



ALUgrate - aluminium drainage grill

Dimension: 21x140mm - Length: 4000mm




Designed to fit our decking and tiling systems of 20mm external grade porcelain paving.

The ALUgrate uses hidden fixings to attach to the sub frame or is surface fixed between the vanes.

The purpose of ALUgrate grating is to remove splash-back issues from water hitting the decking or paving, and in turn splashing onto the doors or facade.

The special geometry of the ALUgrate allows it to 'trap' rainwater, which then falls directly onto the WPM or insulation layer below.


The length of the ALUgrate is 4000mm, offering a seamless installation, where as traditional grating is typically no more than 1200mm.

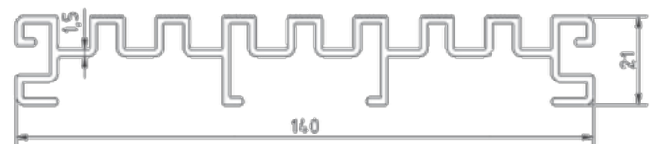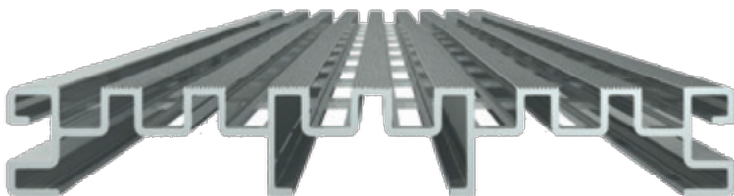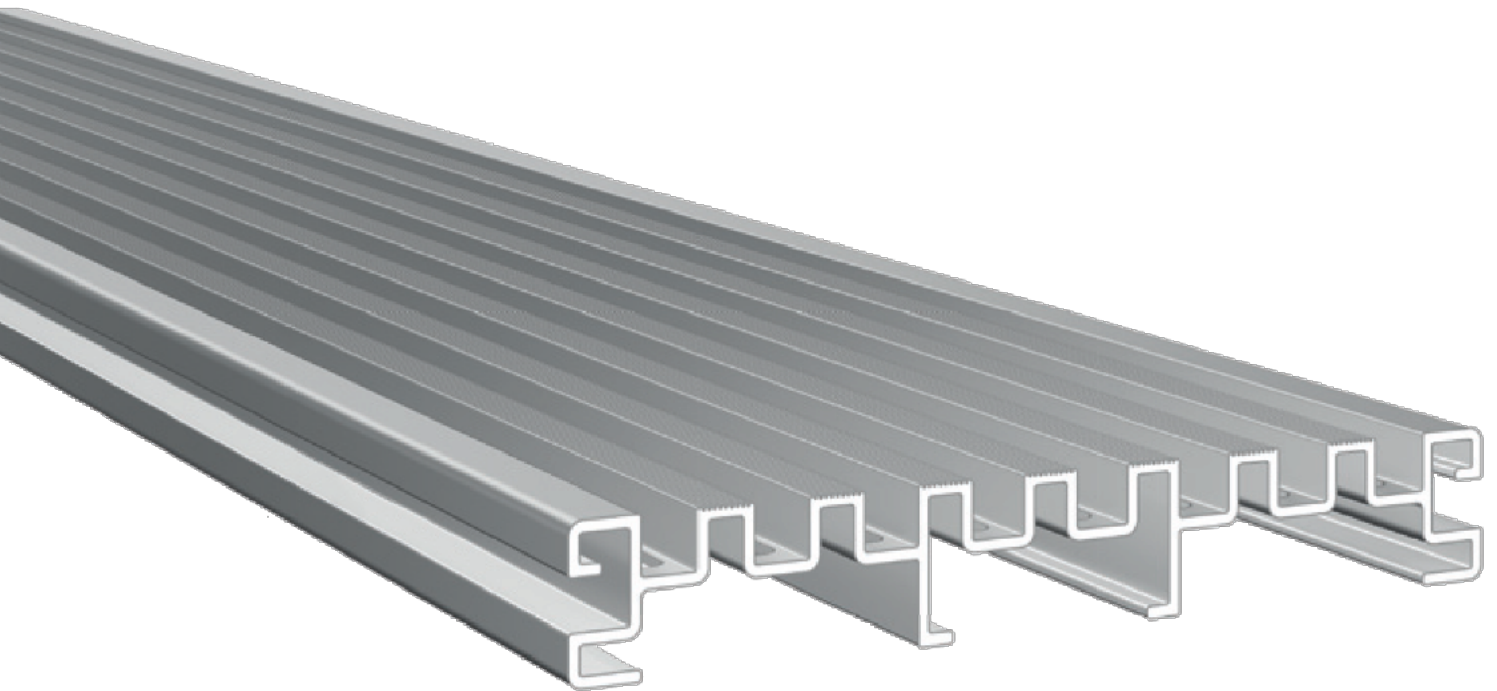




Unrivalled Benefits

- Designed to be incorporated into our external flooring systems
- Easily removed for access to gutters and/or for cleaning
- Perfect where low build up heights are required
- Offers a flush install to other substrates
- Creates a barrier free, wheelchair friendly access

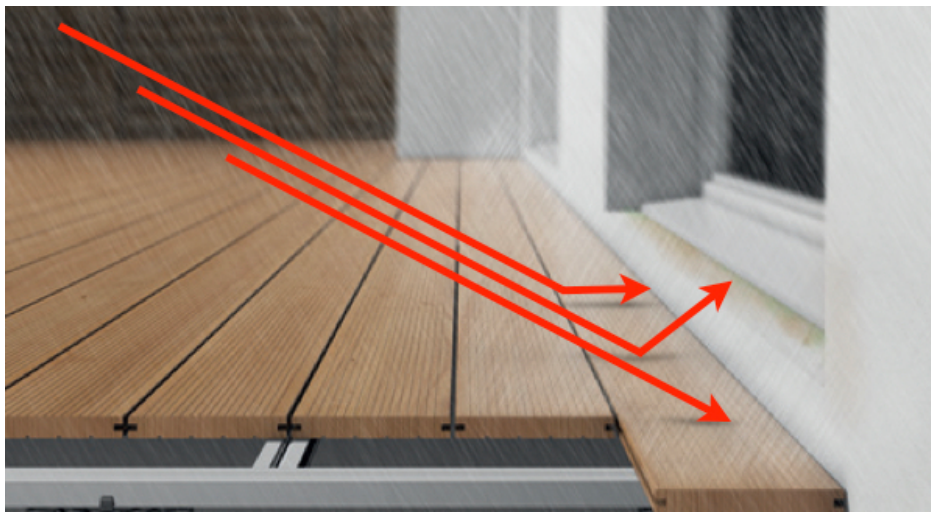

Without **ALUgrate**, the reflected rainwater splashes onto the door element or face cladding.

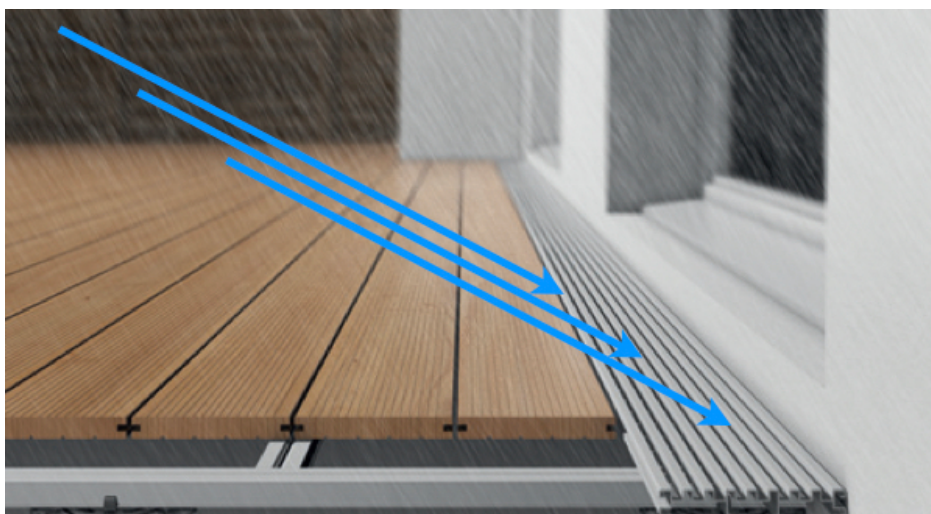

With **ALUgrate**, the rain is drained off in a controlled manner and the rainwater flows directly onto the WPM or insulation layer.



ALUgrate, in situ.