

Installation Instructions



1. Attach the steel legs to the base of the instrument with the M8 Nyloc Nuts and 2 part security caps. **(1.1)** (See Assembly Guide)




2. Attach Surface Fixing posts to legs **(1.2)** (See Ground Fix Post Installation Sheet)

3. **Locate Plate** in desired location and mark holes to fix to desired surface.

4. Fix to Surface using recommended ground anchors not supplied


5. Make sure all fixings are covered and secure using cover caps provided

6. Attach the 1 pair of beater to the saddle strap on the leg. **(1.3)**

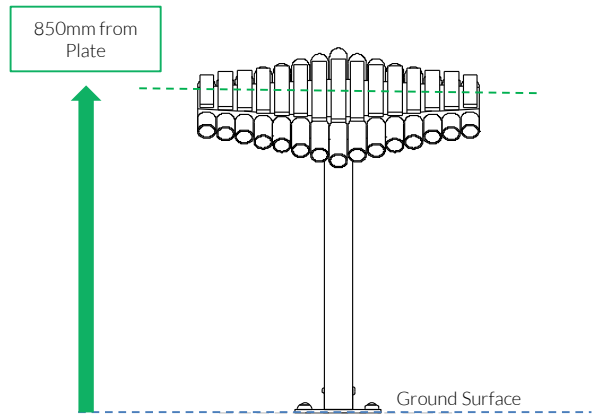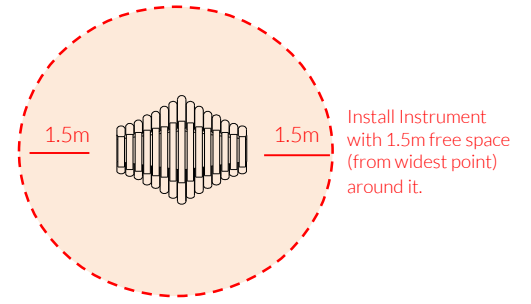

Weight of heaviest part **10.5kg** (Sansa Rimba)

Surface Fixed
Sansa Rimba
Page 1 of 3






Instrument Components:

-  x4
M8 Nyloc Nut
-  x2
M6x20 Security Screw
-  x4
2 Part Cover Cap
-  x1
M6 Saddle Strap

Metric Conversion:
250mm/ 10"
300mm/ 12"
450mm/ 18"
700mm/ 28"
850mm/ 33"
1.5m/ 59"



- Surface Fix Components:
-  x1
 -  x1
 -  x4

Ground Anchors not supplied


Spares available from percussionplay.com or from your local distributor

14 Kg



Tools:

TX 30 Driver Bit x1 TX 40 Driver Bit x1


Surface Fixed
Sansa Rimba
Page 2 of 3




- Instrument Components:**
- x4
M8 Nyloc Nut
 - x2
M6x20 Security Screw
 - x4
2 Part Cover Cap
 - x1
M6 Saddle Strap

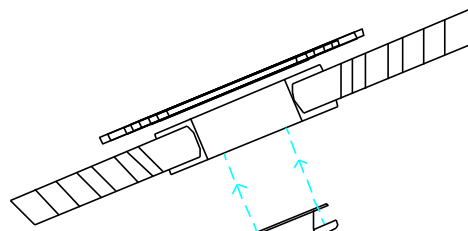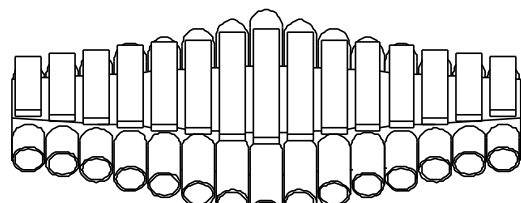

Thread Lock Solution
Required (Not Supplied)

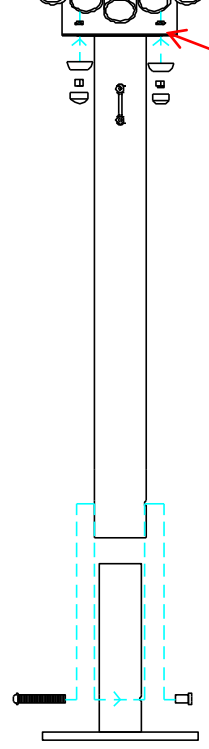


PPSANS FRONT

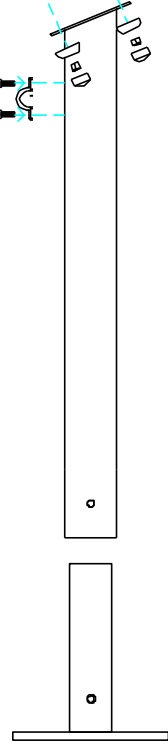

PPSANS SIDE

COMPONENTS LIST:

- 2 Part Cover Cap X8
- M8 Nyloc nut X4
- M10 Nut X4
- M10x200 Threaded Bar X2
- Saddle Strap X1
- M6x20 Pin torx X2
- M10x70 Pin torx X1
- M10 Barrel Nut Pin torx X1



Thread Lock Solution
Required (Not Supplied)

Pair Small Red Beaters X1

Surface Fix Components:

- x1
- x1
- x4

Ground Anchors
not supplied

Spares available from percussionplay.com or from your local distributor


19.5Kg

Tools:

 x2
 TX 45 Driver Bit

Surface Fixed

Sansa Rimba
Page 3 of 3



Components:



x1

M10 Barrel Nut



x1

M10x70 Security Screw




x4

2 Part Cover Cap

Thread Lock Solution
Required (Not Supplied)


Metric
 Conversion:
 50mm/ 2"
 250mm/ 10"
 350mm/ 14"
 400mm/ 16"
 450mm/ 18"

1

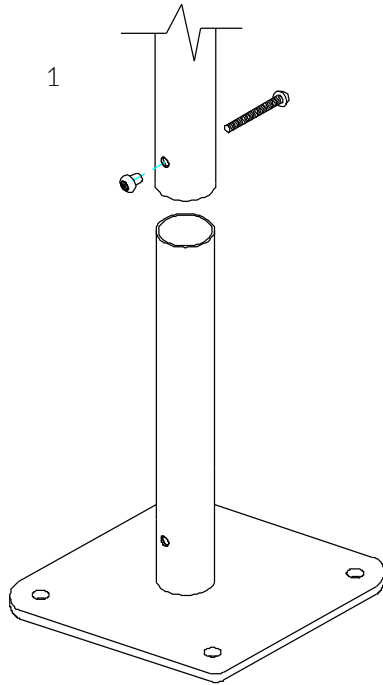


Locate the Surface fix Plate into the leg of the instrument.

2

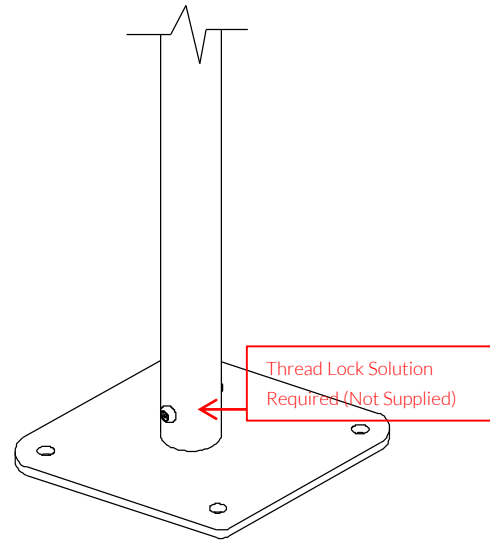

Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use **thread locking solution** to prevent fixings working loose.

3

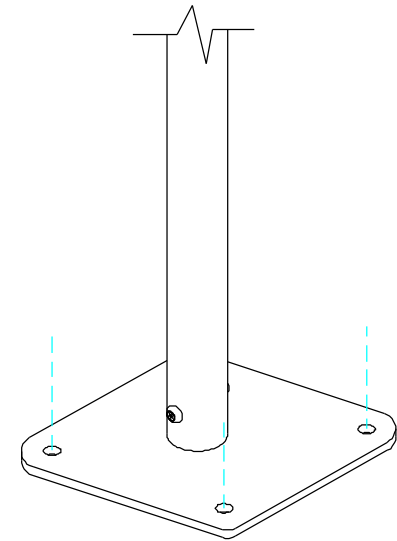

Fix Surface Plate to the ground surface **Ground Anchors Not provided** cover fixings with caps provided

Repeat Parts 1-3 for both legs



MADE IN BRITAIN

BSEN 1176

Installation Instructions



1. Attach the steel legs to the base of the instrument with the M8 Nyloc Nuts and 2 part security caps. **(1.1)** (See Assembly Guide)



2. Attach Ground Fixing posts to legs **(1.2)** (See Ground Fix Post Installation Sheet)

3. Excavate 1 hole for the Steel legs **250mm diameter by 350-500mm deep** depending on Key stage, in desired location upon decision from customer.

4. Locate (lower) legs into holes making sure they are vertical and level prior to concreting in place.

5. Once happy with location of the Instrument, **fill** holes using rapid hardening **concrete**. Be sure to compact concrete around legs and leave to dry according to manufactures guidelines.

6. Attach the 1 pair of beater to the saddle strap on the leg. **(1.3)**

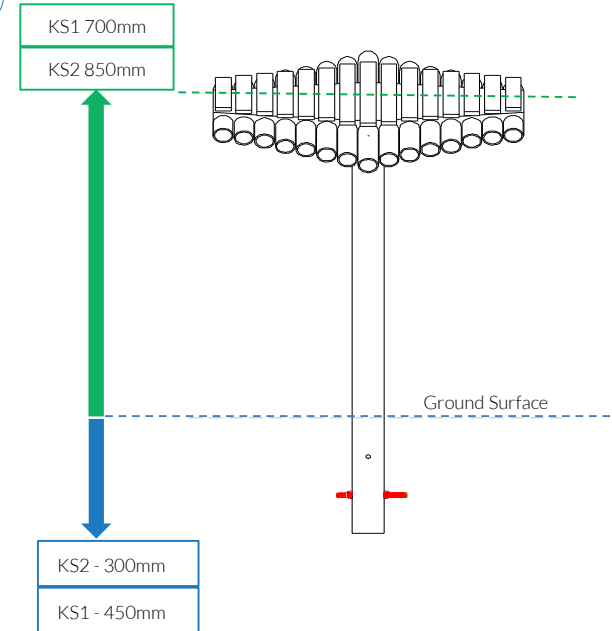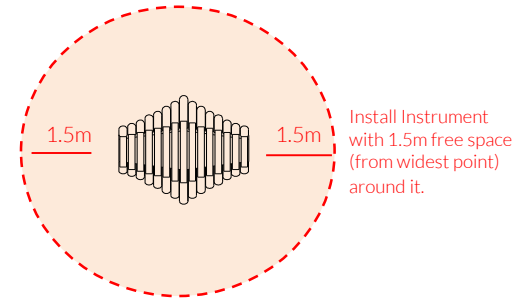

Weight of heaviest part **10.5kg** (Sansa Rimba)

Ground Fixed

Sansa-Rimba
Page 1 of 3



Instrument Components:

-  x4
M8 Nyloc Nut
-  x2
M6x20 Security Screw
-  x4
2 Part Cover Cap
-  x1
M6 Saddle Strap

Metric Conversion:
250mm/ 10"
300mm/ 12"
450mm/ 18"
700mm/ 28"
850mm/ 33"
1.5m/ 59"





Ground Fix Components:



Spares available from percussionplay.com or from your local distributor


19.5 Kg

Tools:

 x1
  x1

Ground Fixed

Sansa-Rimba
Page 2 of 3




Instrument Components:







-  x4
M8 Nyloc Nut
-  x2
M6x20 Security Screw
-  x4
2 Part Cover Cap
-  x1
M6 Saddle Strap

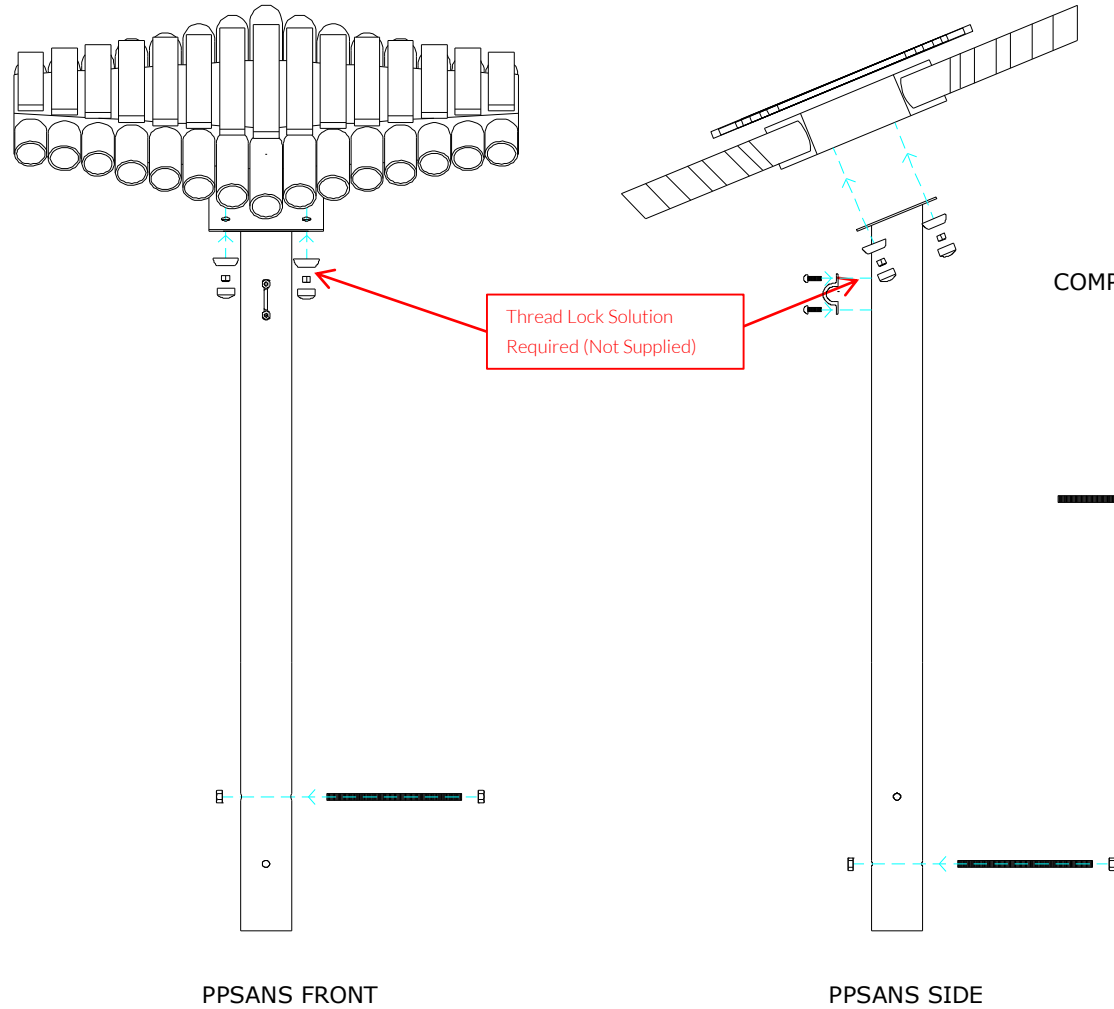M6 Saddle Strap

Thread Lock Solution
Required (Not Supplied)



COMPONENTS LIST:

-  2 Part Cover Cap X4
-  M8 Nyloc nut X4
-  M10 Nut X4
-  M10x200 Threaded Bar X2
-  Saddle Strap X1
-  M6x20 Pin torx X2



Pair Small Red Beaters X1


Ground Fix Components:

-  x2
M10x200 Bolt
-  x4
M10 Nut


Spares available from
percussionplay.com or from your
local distributor

19.5 Kg


Ground Fix Post Installation

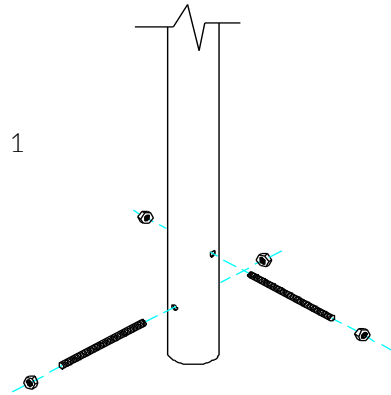

1
Insert M10x 200 Threaded bar into pre drilled holes in Ground Fixing Post

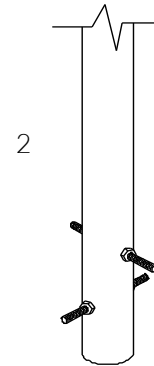


2
Fix M10x 200 Threaded bar in place using M10 Nuts

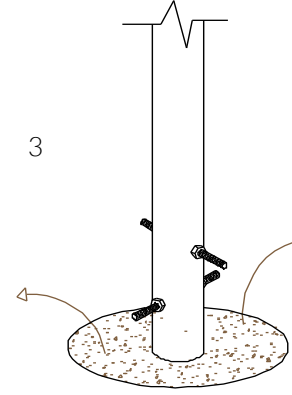


3
Excavate a hole with a 250mm diameter tapering down to 350mm diameter and 350mm depth

Foundations should not present a hazard. These foundations are recommended as a guide, for more information on foundation details for various surface see Part 7 of BS EN 1176.




4
Compact base of hole with 50mm of aggregate. Lower ground Fix post attached of instrument into hole (check instrument straight and level before filling with concrete)

300mm min depth




5
Fill hole with fast drying concrete to manufacturers specifications.

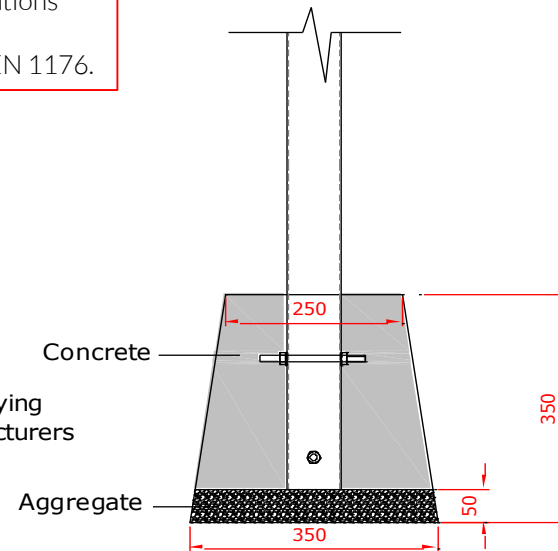

Ground Fixed

Sansa-Rimba
Page 3 of 3



Components:

 x2
M10x200 Bolt

 x4
M10 Nut

Metric Conversion:

50mm/ 2"
250mm/ 10"
300mm/ 12"
350mm/ 14"
400mm/ 16"
450mm/ 18"

Installation Instructions

Wall Fixed

Sansa Rimba
Page 1 of 2



Weight of heaviest part **10kg** (Sansa Rimba)

1. Attach the steel leg to the base of the instrument with the M8 Nyloc Nuts and 2 part security caps. **(1.1)** (See Assembly Guide)



2. Attach Wall Fixing posts to legs **(1.2)** (See Ground Fix Post Installation Sheet)

3. Mark hole locations (X4) using the pre drilled holes in square plate.

4. Drill hole locations (X4) according to your chosen fixings (frame fixings, wall bolts or chemical anchors) depending of the structure of the wall. **(Not Supplied)**

5. Fix through Plate with suitable fixings (not supplied) in correct orientation and height for intended Key stage. Cover Fixings with 2 Part Caps supplied

6. Attach the 1 pair of beater to the saddle strap on the leg. **(1.3)**

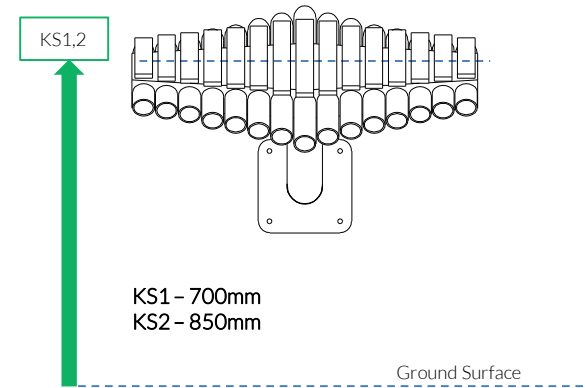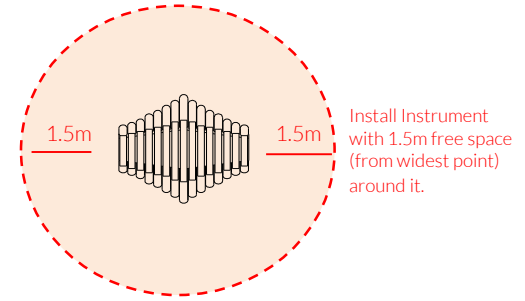

Instrument Components:

- x4
M8 Nyloc Nut
- x2
M6x20 Security Screw
- x4
2 Part Cover Cap
- x1
M6 Saddle Strap

Metric Conversion:
700mm/ 28"
850mm/ 33"
1.5m/ 59"



Pair Small Red Beaters X1

Wall Fix Components:

- x4
2 Part Cover Cap

Wall Fixings/ Anchors not supplied

Spares available from percussionplay.com or from your local distributor

14 Kg

Tools:



x1
TX 30 Driver Bit


Wall Fixed

Sansa Rimba
Page 2 of 2





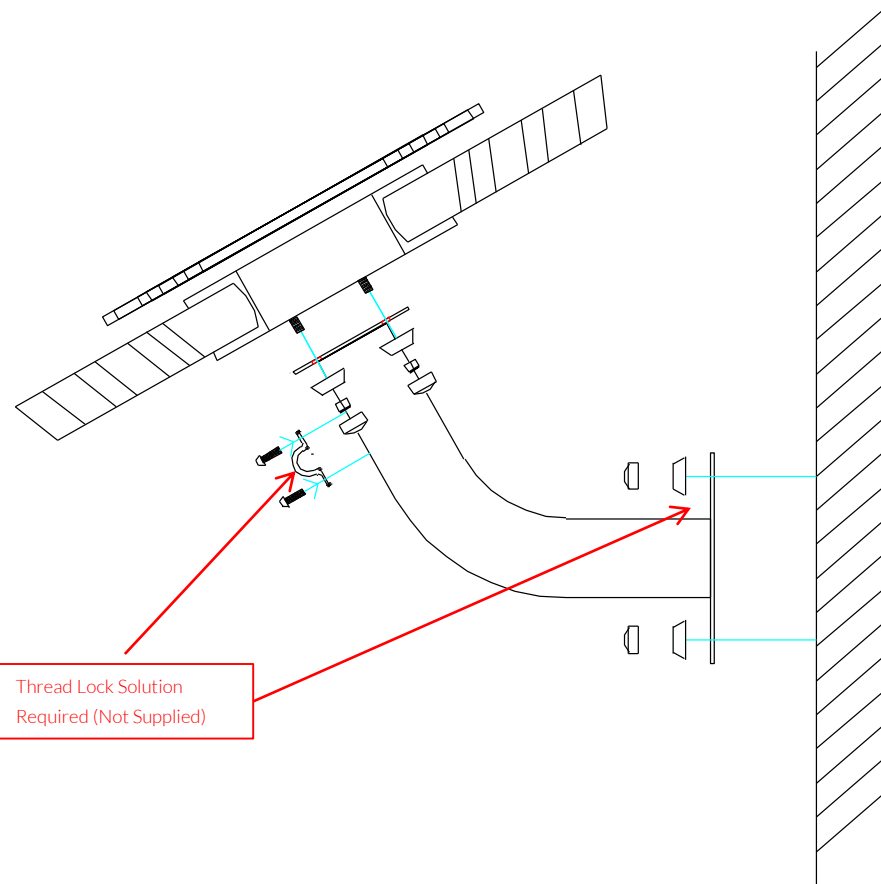

Instrument Components:

-  x4
M8 Nyloc Nut
-  x2
M6x20 Security Screw
-  x4
2 Part Cover Cap
-  x1
M6 Saddle Strap




Thread Lock Solution
Required (Not Supplied)

COMPONENTS LIST:


-  2 Part Cover Cap X8
-  M8 Nyloc nut X4
-  Saddle Strap X1
-  M6x20 Pin torx X2

Thread Lock Solution
Required (Not Supplied)



Pair Small Red Beaters X1

Wall Fix Components:

-  x4
2 Part Cover Cap

Wall Fixings/
Anchors not
supplied

Spares available from
percussionplay.com or from your
local distributor

14 Kg