

# CLD Vizogril


Rigid Fencing System



Find out more  
Scan for more information

## Description

CLD Vizogril has all the qualities of a high quality perimeter fencing system that ensures the protection of high security places including airports, seaports and prestigious buildings. Modern and renowned for its stability in the architectural world, the condensed strong mesh panels are incredibly difficult to cut through, and with heights up to 2514mm, Vizogril™ provides the perfect rugged boundary around your premises. The rigid system also conforms to BS 1722 fencing standards, providing excellent quality assurances and a guarantee that you're investing in fencing that will perform to your expectations.

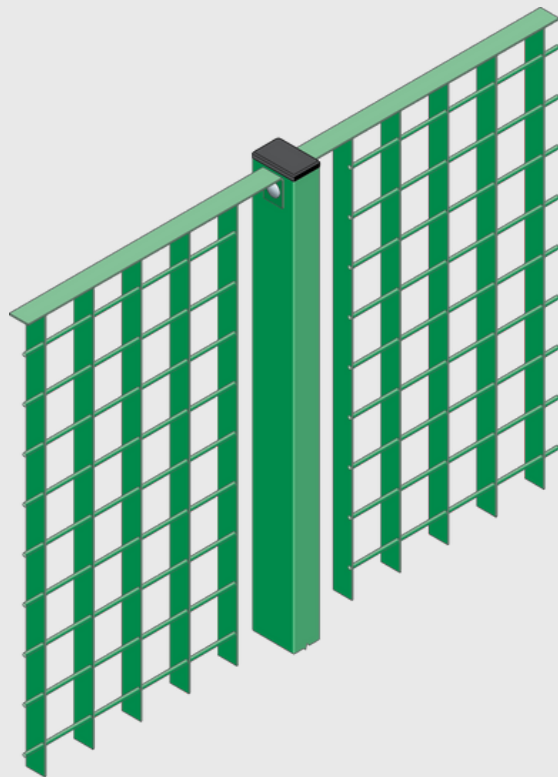

## Features

Strong anti-cut features

Excellent visibility

Robust barrier construction

Exploded view of post and fixing details for the CLD Vizogril  
This product has additional features not demonstrated for security reasons



# CLD Vizogril


Rigid Fencing System

## Product Technical Information

Standard BS1722-14:2017

Panel Type	Electrofused steel grating consisting of vertical flat bars with horizontal wires. Top and bottom flat bars.
Panel Width	1992mm
Wire Diameter	25mm x 2mm vertical flat bars, 4.5mm horizontal wires. Tops and bottoms 25mm x 4mm flat bars.
Mesh size	62 x 66mm
Fixings	Depending on application – please contact CLD Fencing Systems for full details.
Available Heights	930mm, 1194mm, 1326mm, 1458mm, 1722mm, 1986mm, 2118mm or 2514mm (fencing can be made up of any combination of these sizes)
Nominal Heights	1.0, 1.2m, 1.4m, 1.5m, 1.8m, 2.0m, 2.2m or 2.6m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Panel installation	Bottom of panel approx 40mm above ground
Posts	RHS or SHS, depending on application galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Depending upon application
Post Centres	Depending on post section
Foundations	Set posts in holes 300mm diameter x 800mm deep (adjust according to fence height) Note: contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects.

## System Details

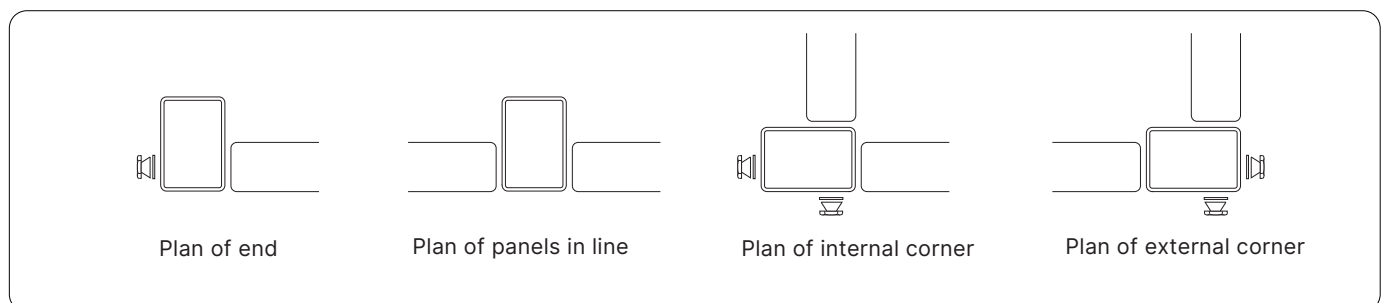

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_Vizogril\_20230419