



PERIMETER
SECURITY
MANUFACTURER

PRODUCT TITLE:
Lochrin UltraGUARD SL2
PRODUCT DATA SHEET



WHY CHOOSE ULTRAGUARD SL2 MESH SUPPLIED BY LOCHRIN BAIN

- Certified to LPS1175 Issue 8: B3 (SR2).
- Close mesh apertures to help delay cutting and climbing of panels.
- Independently attack tested for a proven robust perimeter solution.
- Minimum guaranteed delay time of 3 minutes against attacks using tools such as bolt cutters and hacksaws.
- Simple installation utilizing a single skin panel design in place of the traditional double skin 358 design.
- Secured By Design product which is a Police preferred specification.
- Excellent see-through visibility.
- Blends in well with a variety of surroundings.
- 25-year design life guarantee available.
- Full range of Pedestrian and Vehicle gates available.
- Cantilever gates available.
- A wide range of RAL colours available.



RAIL



INDUSTRIAL



COMMERCIAL



UTILITY



BORDER



MILITARY



#WESECUREWHATYOUNEEDTOPROTECT

WWW.LOCHRIN-BAIN.CO.UK SALES@LOCHRIN-BAIN.CO.UK +44 (0)1236 457333






PERIMETER
SECURITY
MANUFACTURER

PRODUCT TITLE:
Lochrin UltraGUARD SL2
PRODUCT DATA SHEET

Product Technical Information

Standards:	Manufacturing: BS1722-14: 2017. Galvanizing: BS EN ISO 1461:2009. Powder Coating: BS EN 13438:2013 Certified to LPS1175 Issue 8:B3 (SR2).
Panel Height:	2.4m / 3.0m high – bespoke heights available from 2.4m up to 5.0m.
Panel Type:	Single Layer Rigid Mesh Panel. Pre-Galvanised and Powder Coated.
Panel Width:	2525mm.
Mesh Diameter:	4mm Horizontal and 10mm Vertical wires.
Mesh Aperture:	76.2mm x 12.7mm
Available heights:	2430mm and 3030 with alternative heights available on request.
Posts:	80mm x 80mm RHS x 3200mm (2430mm Panel) or 4000mm (3030mm Panel).
Cap:	80mm X 80mm Plastic post cap.
Fixings:	80mm x 5mm MSF Clamp bar HDG & PPC Coated c/w M8x120mm Coach Bolt and Shear Nuts.
Post Centres:	2525mm (+/-10mm).
Finish:	Galvanized as standard with an option to Powder Coat to various RAL colours including marine grade if required.
Anti-Climb Toppings:	Various options available on request including extensions for Barb, Barbed Tape, Razor Coil & Rotating Spikes.
Gates:	Pedestrian and Vehicle gates are manufactured in various widths to suit LPS1175 Issue 8: B3 UltraGUARD Specification.
Enhancements:	Compatible with all EPID & MPID systems.
Foundations:	Foundation details vary depending on the fence height, site location and ground conditions. This is the responsibility of the contractor/client.
Warranty:	10 or 25 Year design life guarantee provided upon request.

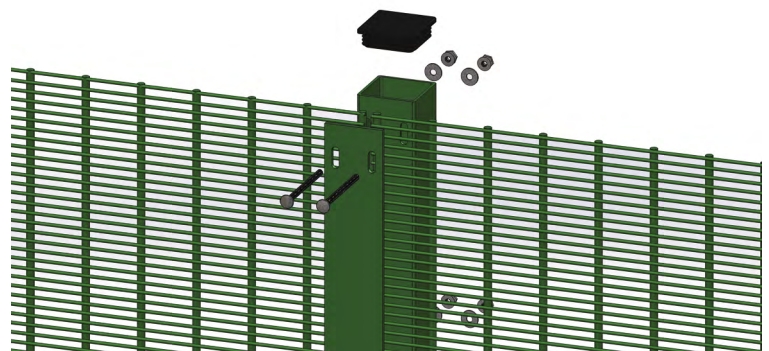

CLICK NOW

SCAN
QR CODE
TO FIND
OUT MORE

DISCLAIMER

Contractors shall employ experienced installers, providing qualified supervision to complete works as specified by the manufacturer and in accordance with BS1722-14:2017. Every care has been taken to ensure that the information provided in this document is accurate at date of print. Lochrin Bain Ltd reserve the right to change product specification at any time. Contractors must ensure exact dimensions and specification is confirmed prior to ordering of material and installation.

Document Ref: DS/358UGSL2



#WESECUREWHATYOUNEEDTOPROTECT

WWW.LOCHRIN-BAIN.CO.UK SALES@LOCHRIN-BAIN.CO.UK +44 (0)1236 457333

