

Blox D - Cycle Shelter Compound BX/MW/BLOX/D/41/OF-FSC



Standard Unit Dimensions:

Width: 5000mm
Height: 2200mm to eaves

Length with Capacities:













4100mm (20 cycles)
5000mm (24 cycles)

Timber Colours/Finishes:



European Redwood

Framework Colours/Finishes:

 Galvanised Only	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

FSC[®] (FSC-C122338) timber slatted cycle compound with steel frames.

Features

- Modular galvanized shelter frame with Colorcoat roof
- A variety of hardwood and softwood timbers are available
- Open entrance as standard

Materials Used

- Framework - Mild steel
- Cladding - European redwood

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Power Coated

Fire Resistance

Additional treatment available at additional cost

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED



Guarantees, Warranties, Design-Life and Life-Expectancies

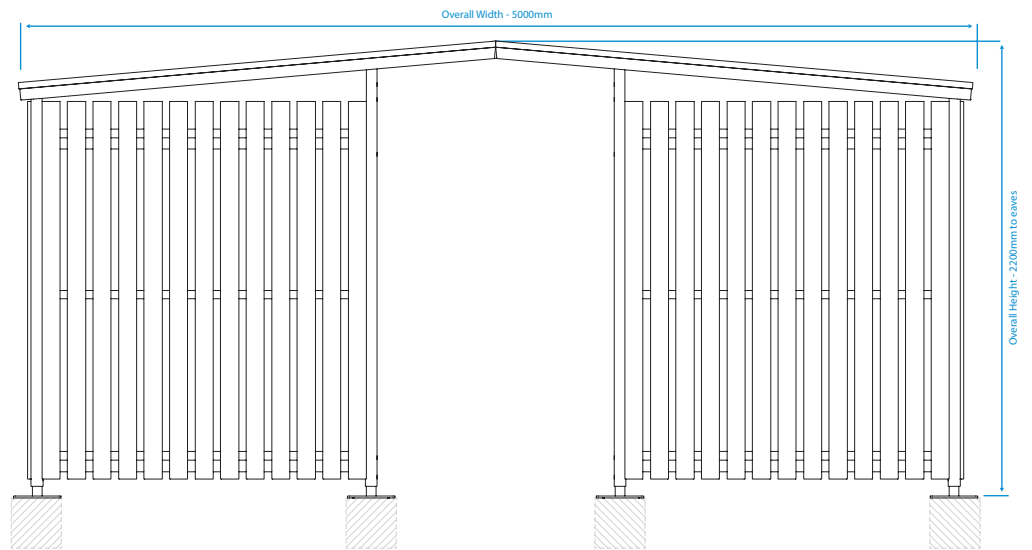
- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Varied Range of Cycle Racks
- Varied Range of Cycle Stands
- 5000mm length and 24 cycle capacity available
- Mesh clad gates or timber clad gates with hasp and staple lock
- The modular design allows for larger compounds to be created
- Powder coated framework
- Bespoke Blox cycle shelters also available to accommodate your requirements
- Galvanized Sheffield Cycle Rack to suit
- LED lighting or solar lighting
- Full installation service

Diagram



Standard Unit Dimensions:

Width: 5000mm
Height: 2200mm to eaves

Length with Capacities:

4100mm (20 cycles)
5000mm (24 cycles)

Timber Colours/Finishes:




European Redwood

Framework Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

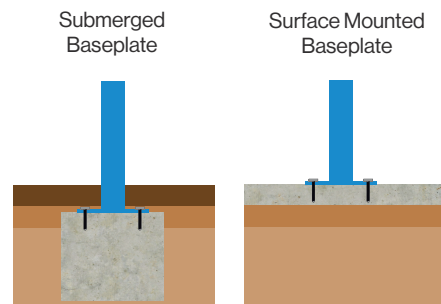Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com