

### Standard Unit Dimensions:

Width: 1250mm  
Height: 2300mm

### Lengths with Capacities:

2000mm (5 Cycles)  
3600mm (8 Cycles)  
4100mm (10 Cycles)

### Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Eco-Guest Space-Saving Shelter is a cost effective and robust solution. Its modular design enables the storage of a large number of bikes at once. With a variety of product options to choose from, the Eco-Guest Space-Saving Shelter stands out as one of the most ideal solutions for space-saving cycle storage.

## Features

- Adjustable baseplates
- Roof Cladding: Clear 4mm PETg UV
- Framework galvanised & polyester powder coated to a stock BS/RAL colour
- Tower Bridge cycle stands galvanised & polyester powder coated black
- Robust modular construction featuring load-bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high-strength bolts

## Materials Used

- Framework - Mild Steel
- Cladding - 4mm PETg UV
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

## Weather Resistance

- Cladding is UV Stabilised
- Wind resistant to 23m/s

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001  
Quality Management Systems  
CERTIFIED

ISO 14001  
Environmental Management  
CERTIFIED

ISO 45001  
Occupational Health and Safety Management  
CERTIFIED



## Eco-Guest Space Saving Shelter BXMW/ECO/GUEST

### Fire Resistance

- Cladding is fire tested to EN ISO 11925-2

### Finish Options

- Galvanised to BS EN ISO 1461
- Galvanised to BS EN ISO 1461 & Polyester Power Coated

### Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply

### Options

- 4mm PETg UV side panels
- 4mm PETg UV rear panels
- Swinging Security Gates
- Mechanical or Keyed Locks
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service













#### Standard Unit Dimensions:

Width: 1250mm  
Height: 2300mm

#### Lengths with Capacities:

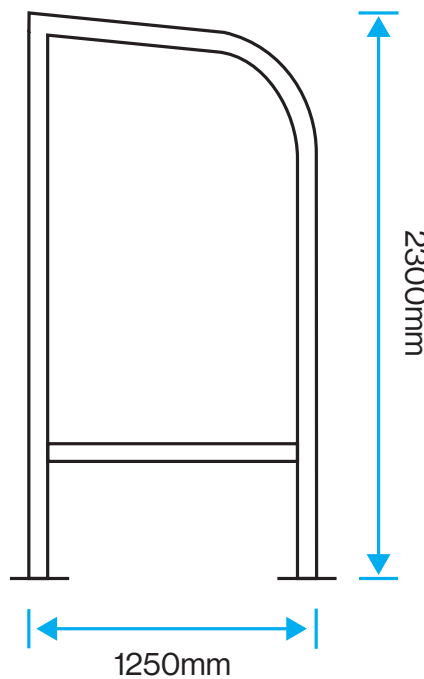
2000mm (5 Cycles)  
3600mm (8 Cycles)  
4100mm (10 Cycles)

#### Colours/Finishes:

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

### Diagram



### Installation

