

Plymouth Wave Canopy BXMW/PLY








Standard Unit Dimensions:

Length:
4100mm & 5000mm

Width:
4000mm

Height:
3680mm at back
2380mm at front

Framework Colours/Finishes:

 Galvanised Only	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the
actual colour.

Product Information

The Plymouth Wave Senior is a contemporary structure that makes a fantastic entrance canopy or covered area, it is modular in construction allowing further stages to be added. The curved roof of this Plymouth Wave Canopy gives a wonderful feel of space beneath and with minimal supports is not intrusive to any environment. Ideal for use as an outdoor classroom or outdoor dining area.

Features

- ClearView PETg UV roof
- Robust tough construction
- Angled roof to shed rainwater to the rear
- Anti-climb end frames
- Submerged fixing
- Welded end frames and purlin section made from heavy-duty box
- Hot dipped galvanised to BS EN ISO 1461:2009

Materials Used

- Framework - Mild steel
- Cladding - 16mm structured multi-wall polycarbonate
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Plymouth Wave Canopy BXMW/PLY

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Various sizes & bespoke versions available
- Trapezoidal Roof Cladding (other finishes available)
- Rain guttering
- Internal lighting or solar lighting
- Installation service available

Standard Unit Dimensions:

Length:
4100mm & 5000mm

Width:
4000mm

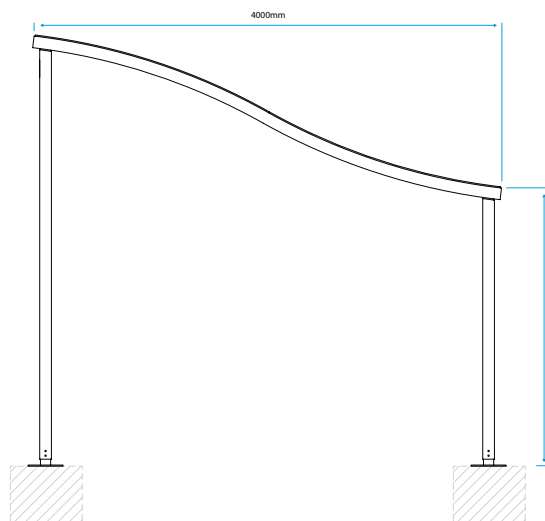
Height:
3680mm at back
2380mm at front

Framework Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram



Installation

