

## Poplar Mild Steel Tree Guard BX14 1275



### Standard Unit Dimensions:

Height: 1800mm  
Diameter: 450mm

### Colours/Finishes:

RAL 9005 Jet Black	RAL 9016 Traffic White	RAL 7016 Anthracite Grey
-----------------------	---------------------------	-----------------------------

RAL 5013 Cobalt Blue	BS 4800 20 C 40 Duchess Blue	BS 4800 00 A 05 Goose Grey
-------------------------	---------------------------------	-------------------------------

RAL 6005 Green	BS 4800 14 C 39 Holly Green	BS 4800 18 B 25 Admiral Grey
-------------------	--------------------------------	---------------------------------

RAL 5015 Sky Blue	RAL 3020 Traffic Red	RAL 1023 Traffic Yellow
----------------------	-------------------------	----------------------------

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

Mild steel circular tree guard available in a range of sizes. Bespoke options also available.

## Features

- Mild steel circular tree guard
- Reduce soil compression
- Shield the trunk

## Materials Used

- Mild steel

## Options

- Custom versions available
- Spiked leg adaption available
- Available with any diameter size

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001  
Quality Management Systems  
CERTIFIED


ISO 14001  
Environmental Management  
CERTIFIED

ISO 45001  
Occupational Health and Safety Management  
CERTIFIED



## Poplar Mild Steel Tree Guard BX14 1275

### Diagram

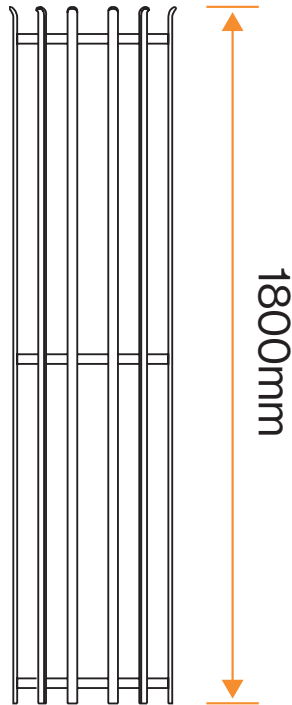

#### Standard Unit Dimensions:

Height: 1800mm

Diameter: 450mm

#### Colours/Finishes:

RAL 9005 Jet Black	RAL 9016 Traffic White	RAL 7016 Anthracite Grey
-----------------------	---------------------------	-----------------------------

RAL 5013 Colbalt Blue	BS 4800 20 C 40 Duchess Blue	BS 4800 00 A 05 Goose Grey
--------------------------	---------------------------------	-------------------------------

RAL 6005 Green	BS 4800 14 C 39 Holly Green	BS 4800 18 B 25 Admiral Grey
-------------------	--------------------------------	---------------------------------


RAL 5015 Sky Blue	RAL 3020 Traffic Red	RAL 1023 Traffic Yellow
----------------------	-------------------------	----------------------------

The colours shown are a guide only. Please check a colour chart to see the actual colour.

### Installation


Broxap strongly recommend that guards be bolted to the frame when used with a grille in order to provide maximum rigidity and reduce damage caused by vandalism.

#### Spiked Leg



Spiked legs can be pushed directly into the ground or permanently secured by concreting in. The standard length of spiked legs is 400mm, although this can be altered as required.

#### Bolt to Frame



Broxap guards have bolt-to-frame fixings when used in conjunction with a medium duty frame, all other applications have spiked legs for fixing directly into the ground.