

CLD FenceSafe Securus S2

Temporary Fencing System Rated to LPS 1175 B3 (SR2) Issue 8



Physical Security Systems



Find out more
Scan for more information

Description

FenceSafe Securus S2 offers safety, security, and sustainability, with its innovative foundation-free cantilevered base and Securus 10 S2 mesh fencing. Security rated to LPS 1175 (B3), this system guarantees a minimum 3-minute delay against attacks. Reusable and adaptable, both the base and panels can be repurposed for a permanent fence line. Available for rent or purchase.


Features

Bottom rail for added security

Ideal for Major events, Utilities, Crowded Places, Airports

Full length clamp bar with no external fixings

Through bolt with rear fastening

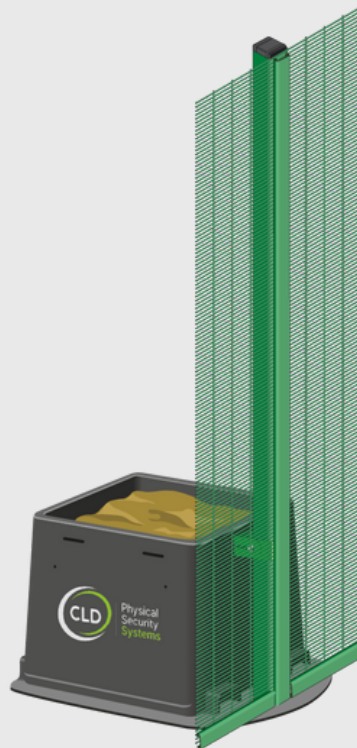

Exploded view of post and fixing details for the CLD FenceSafe Securus S2
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD FenceSafe Securus S2

Temporary Fencing System Rated to LPS 1175 (SR2) Issue 8

Product Technical Information

Standard	LPS 1175 B3 (SR2) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2022 BS EN 13438:2013
Panel Type	Installed using CLD FenceSafe Base. Mesh and wire.
Panel Width	2524mm
Wire Diameter	4mm nominal horizontals & 10mm nominal verticals
Mesh size	76.2 x 12.5 mm mesh
Fixings	50 x 11mm channel and 41mm x 21mm clamping channel and CLD SafeTFix hidden fixing system
Available Heights	2440mm
Nominal Heights	2.4m (other heights available uncertified)
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	Nil
Panel installation	Bottom of panel maximum 50mm above ground with bottom channel fixed every 230mm
Topping Options	Barbed and razor wire, cranked and straight available if required
Posts	60x60 RHS post, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	60mm x 60mm. Floating corner posts 60mm x 60mm
Post Centres	1274mm +/- 9mm
Foundations	Installed using CLD FenceSafe Base, with 4-way adjustable bracket and 200kg of ballast. System to be designed in accordance with BS6399-2 or BS EN 1991 for area of use.
Warranty	Minimum of 15 years against manufacturing defects

System Details

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_FenceSafe_Securus_S2_DS_20240126