

CLD HoardSafe S1


Site hoarding to LPS 1175 A1 (SR1) Issue 8



Find out more
Scan for more information

Description

HoardSafe is CLD's range of sustainable and secure hoarding. Manufactured from composite recycled plastic panels which click easily into place and are installed on steel rails. HoardSafe S1 is a security rated version which incorporates a Securus steel mesh panel to the rear which has been certified by the Loss Prevention Certification Board to provide a minimum of 60 seconds against attack. The system can be fixed to blocks or ground buried, transportation and installation.

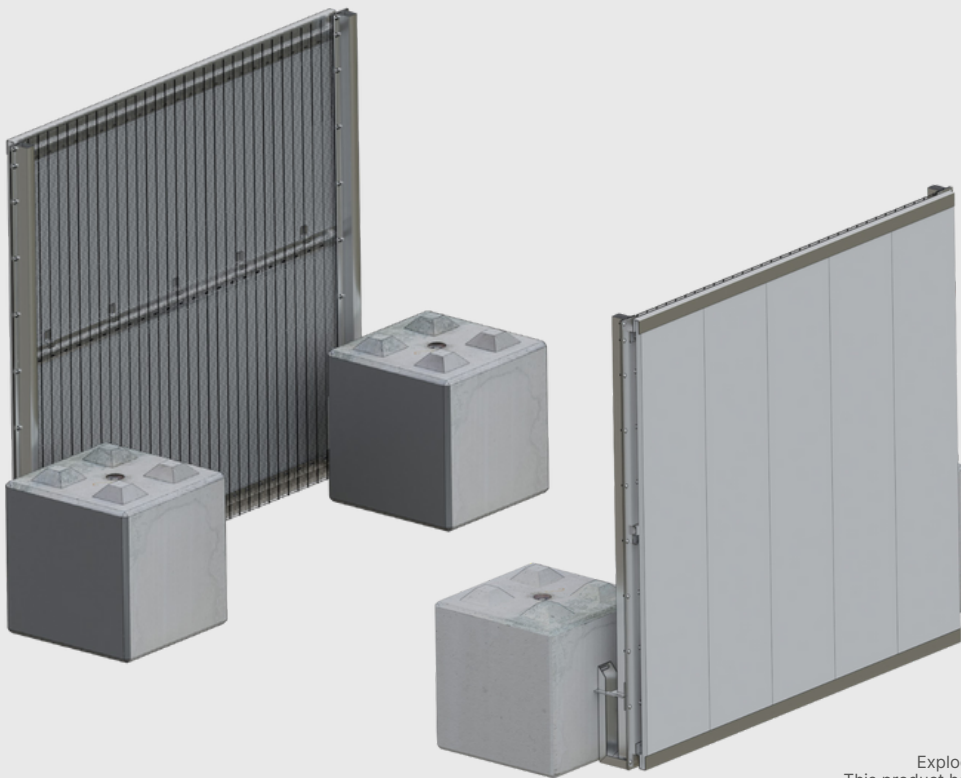

Features

Security rated site hoarding

Sustainable alternative to standard hoarding

BS EN 1991 wind loading tested to in excess of 100 mph

Ideal for Sensitive construction sites requiring high security, or protecting people in open spaces.

Exploded view of post and fixing details for the CLD HoardSafe S1
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD HoardSafe S1

Site hoarding to LPS 1175 A1 (SR1) Issue 8

Product Technical Information

| | |
|----------------------------|--|
| Standard | LPS 1175 A1 (SR1) Issue 8 BS EN ISO 1461:2009 BS EN 13438:2013 BS EN 1991 Wind Loading TWf2012:01 Temporary Works Forum Secured by Design - Police Preferred Specification |
| Panel Type | 35mm thick recycled PVC board, 500mm wide panels, height to suit CLD Securus mesh panel to rear |
| Panel Width | 500mm minimum |
| Wire Diameter | 4mm minimum |
| Mesh size | 76.2 x 12.5 mm mesh |
| Fixings | M8 cup square bolt with washer & hex nut |
| Available Heights | 1806mm to 3006mm |
| Nominal Heights | 1.8m to 3m |
| Finish | Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available |
| Top Edge Projection | - |
| Panel installation | Bottom rail to follow ground level |
| Topping Options | Options such as anti-climb available on request |
| Posts | Special flanged post, galvanised after manufacture |
| Post Dimensions | 80mm x 60mm |
| Post Centres | 2520mm |
| Foundations | Post fixed to kentledge block using 4 way adjustable bracket. Ground bury option. Can also be dug in. Set posts in holes minimum of 450mm square x 800mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence. |
| Warranty | Minimum of 15 years against manufacturing defects |

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_HoardSafe_S1_DS_20230628