



### Standard Unit Dimensions:

Bespoke sizes to suit customer requirements

### Framework Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

## Product Information

The Glazed Hartcliffe Walkway offers a Monopitch, Cantilever design which slopes to the front. This offered the unique advantage of being able to link the guttering with the downpipe using the support arms for the glazing. With uprights down one side only, this is ideal for applications where two rows of uprights cannot be accommodated due to obstructions (E.g Existing services near a building, Doorways, Windows etc).

Corners and bends can be easily accommodated using hip joints. The glazed Hartcliffe can also accommodate side panels to one side to form a partially enclosed walkway.

## Features

- 8mm Heat Soaked, Toughened & Laminated Glass
- Submerged fixing
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts
- Hot dipped galvanized

## Materials Used

- Framework: Mild Steel
- Roof Sections: Toughened Laminated Glass

## Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



## Glazed Hartcliffe Covered Walkway BXMW/GLAZ-HART



### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply

### Options

- Side Panels in PETg or Glazed Finish
- Opal Cladding on the roof and side panels
- Powder Coating to a wide range of colours
- UPVC or Aluminium Guttering
- LED Lighting or solar lighting
- Full installation service

#### Standard Unit Dimensions:


Bespoke sizes to suit customer requirements

#### Framework Colours/Finishes:


Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

### Diagram

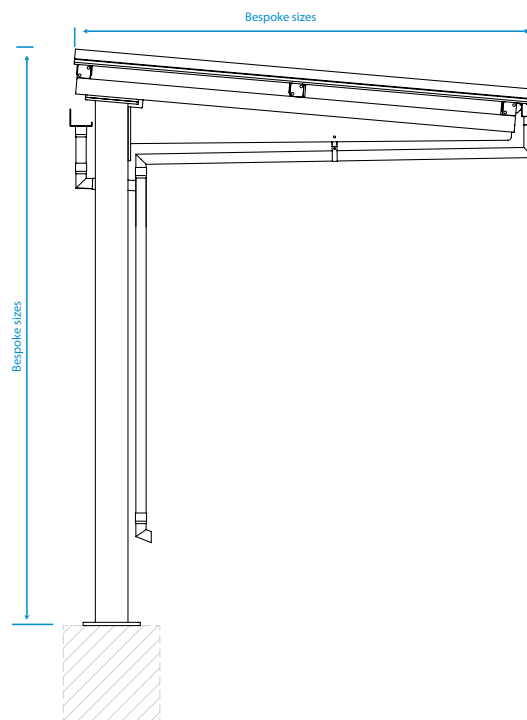

### Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

