


















Standard Unit Dimensions:

Width: 2753mm
Height (Front): 2860mm
Height (Rear): 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
RAL 5015 Mid Blue	Dark Blue	Traffic White
		
BS 4800 20 C 40 Midnight Blue	Dark Admiralty Grey	Moss Green

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Apollo shelter comprised tubular curved end frames and a curved roof to give a sleek minimalistic design. This shelter can work as a single unit but creates a fantastic spectacle when one or more units are positioned side by side or back to back. Modular in design, the Apollo can also be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.

Features

- Robust modular construction featuring tubular end frames
- Heavy-duty circular uprights and box section purlins and trimmers, assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Surface mounted baseplates
- Hot dipped galvanised to BS EN ISO 1461:2022
- 5mm ClearView PETg UV roof cladding
- Bream Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

EMS 202378

EMS 45526

ONS 547079



Apollo Cycle Shelter BXMW/AP

Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461:2022
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply
















Standard Unit Dimensions:

Width: 2753mm
Height (Front): 2860mm
Height (Rear): 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:


		
		
		
		
		

The colours shown are a guide only.
Please check a colour chart to see the actual colour.


Options

- HPS Colourcoat steel profile cladding
- Opal Roof Cladding
- Submerged Baseplates
- Powder coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Diagram

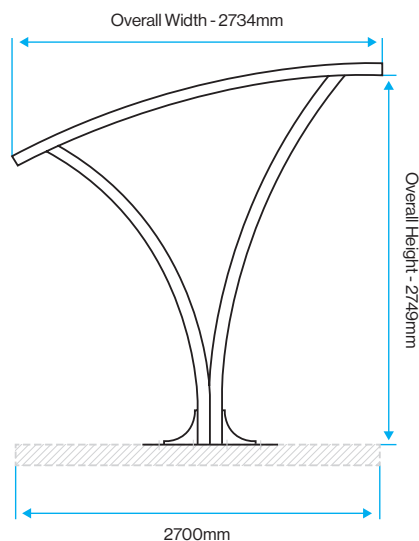

Installation

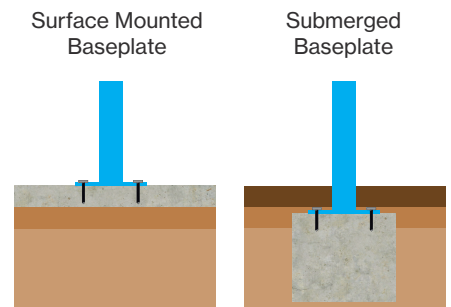

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

