



Standard Unit Dimensions:

Overall Length: 3150mm/4150mm
 Overall Width: 2200mm
 Overall Height: 2380mm
 Column Centres:
 3000mm/4000mm
 Overall Height: 2380mm
 Head Clearance: 2230mm
 Submerged Baseplate: 150mm

Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
Nimbus Grey	Traffic Red	Jet Black
Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

A Contemporary modular walkway, the Burntwood offers a stylish alternative to the PETg and Polycarbonate walkways.

Features

- Trapezoidal roof cladding (Available in a wide range of colours)
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts

Materials

- Framework - Mild Steel
- Cladding - Steel Profile, Trapezoidal roof cladding
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Burntwood Cantilever Walkway BXDB/BURNT-WALK

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply













Options

- Powder Coating to a wide range of colours
- LED lighting or solar lighting
- Full installation service

Standard Unit Dimensions:


Overall Length: 3150mm/4150mm
Overall Width: 2200mm
Overall Height: 2380mm
Column Centres:
3000mm/4000mm
Overall Height: 2380mm
Head Clearance: 2230mm
Submerged Baseplate: 150mm

Colours/Finishes:


		
		
		
		

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

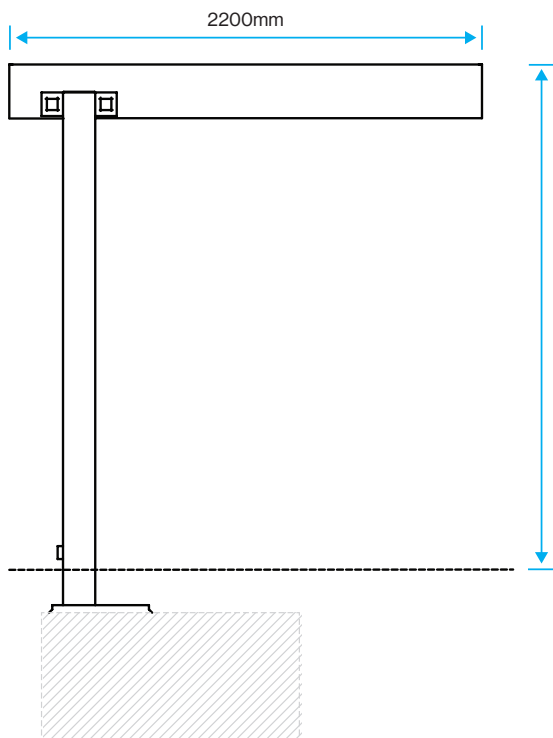

Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

