


















Standard Unit Dimensions:

Width: 4885mm
Height at the front: 2504mm
Height at the rear: 2183mm

Length with Capacities:

3600mm (8 cycles)
4100mm (20 cycles)
5000mm (24 cycles)

Colours/Finishes:

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Coventry Gullwing presents a sleek, contemporary and minimalistic cycle shelter. It has the practicality of being able to accommodate up to 24 cycles under one unit. Modular in design the Coventry Gullwing Cycle Shelter can be linked to form banks of shelters to accommodate large quantities of cycles with access from both sides of the shelter.

Features

- Robust Modular Construction
- Welded End Frames and Purlin Section Made From Heavy-Duty Box Section Assembled with Anti-Tamper High Strength Bolts
- Submerged Baseplates
- Hot Dipped Galvanized to BS EN ISO 1461:2022
- 16mm Structured Multiwall Polycarbonate Roof Cladding
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 16mm Structured Multiwall Polycarbonate
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Finish Options

- Hot-Dip Galvanized to BS EN ISO 1461:2022
- Hot-Dip Galvanized & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

ENR 202378

EMS 40526

OH&S 547079



Coventry Gullwing Cycle Shelter BXMW/COV/GU

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Steel Profile Trapezoidal Roof Cladding
- Powder coating to a wide range of colours
- LED or Solar Lighting
- Multiple banks to increase cycle capacity
- Full Installation Service
- Varied range of Cycle Racks
- Varied range of Cycle Stands
















Standard Unit Dimensions:

Width: 4885mm
Height at the front: 2504mm
Height at the rear: 2183mm

Length with Capacities:

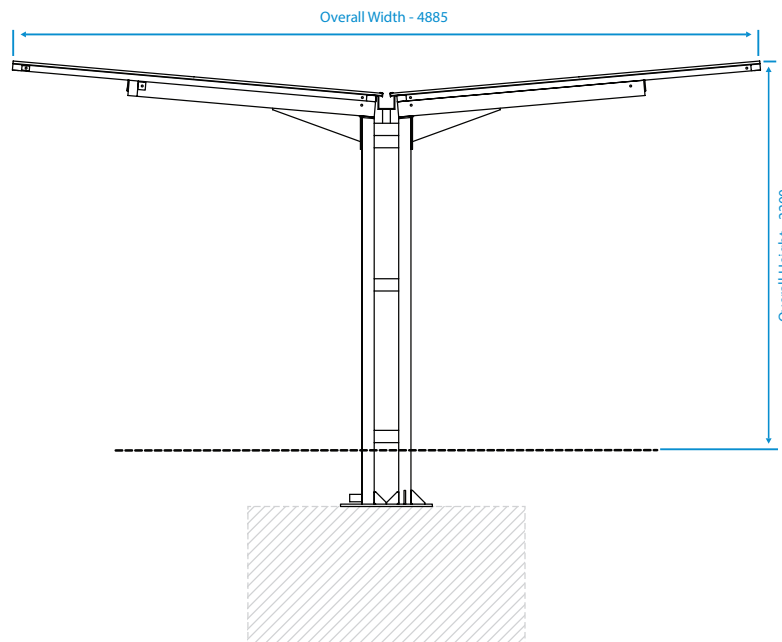
3600mm (8 cycles)
4100mm (20 cycles)
5000 (24 cycles)

Colours/Finishes:


		
		
		
		
		

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram



Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management
System
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

