



Standard Unit Dimensions:







Width: 5280mm
Height: 2150mm

Length with Capacities:

4100mm (20 Cycles)

Other capacities available

Colours/Finishes:

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Wardale® Cycle Compound uses the popular design of our best selling Wardale Cycle Shelter. This modular compound is an attractive addition to any external area and extra security features make it perfect for both public and corporate spaces. This compound is constructed in such a modular and retrofitting way that it lends itself to create large compound structures that can include lockable gates, CCTV, internal helmet lockers and rear security panels.

Features

- Robust modular construction
- Load bearing purlins
- Welded end frames
- Made from heavy-duty mild steel box section 4mm Polycarbonate Side Panels complete with 5mm mesh
- 4mm Polycarbonate Side Panels
- Assembled with anti-tamper high strength bolts
- Swinging Security Mesh Gate with Mechanical Lock
- Hot dip galvanized to BS EN ISO 1461:200

Materials Used

- Framework - Mild Steel
- Cladding - 4mm PETg UV
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Power Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Opposing two shelters creates a versatile and attractive shelter and by adding roof panels, lockable gates and panels the shelter can be made totally secure
- A variety of high security locking methods are available including integral heavy-duty hasp and staple as standard, sliding bolt (both for users own padlock,integrated cylinder lock, swipe card or keypad).
- Padlocks can be supplied permanently attached to the shelter with multiple keys.
- Compound high security gates, panels and roof panels are available in 1000mm, 1250mm and 2000mm widths

Standard Unit Dimensions:

Width: 5280mm
Height: 2150mm

Length with Capacities:


4100mm (20 Cycles)
Other capacities available

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

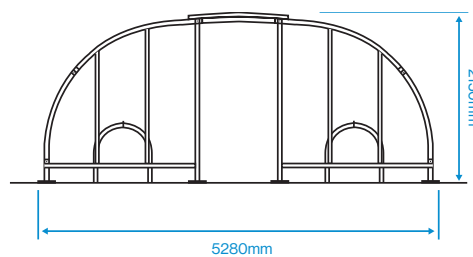

Installation

