




**CED Stone Group**  
 728 London Road, Grays,  
 Essex RM20 3LU  
 technical@cedstone.co.uk  
 estimators@cedstone.co.uk  
 sales@cedstone.co.uk  
 01708 867 238  
 www.cedstone.co.uk  
 Company Reg. No. 624843

# Buff York Technical Data Sheet

**Product Code:**  
 S35-105-3353

**Stone Classification**  
 Sandstone

**Source**  
 Yorkshire-England  **Date Created:**13/05/22

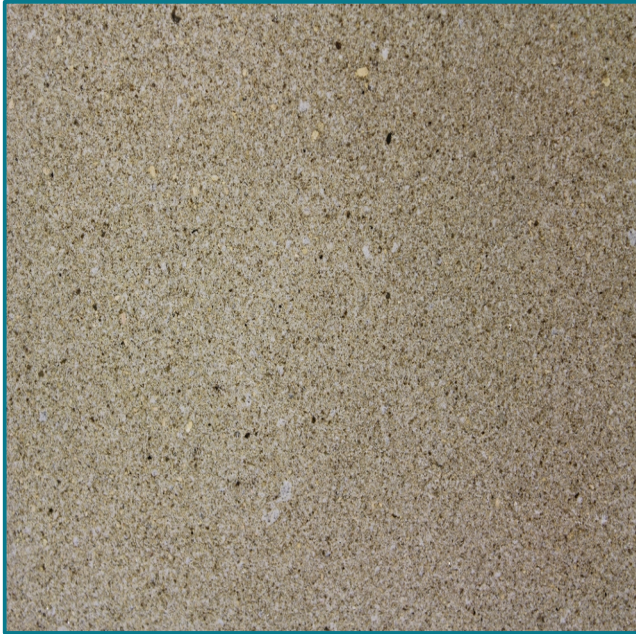

**Please note:**

Sawn tonality variation and finish; Natural variations may occur between image and finished product.



**Project Shot:**

Sawn textured Buff York paving.



Member  
 Respect for workers worldwide



Test	Value	BS EN
Apparent density (g/cm <sup>3</sup> )	2.44	1936: 2006
Water Absorption (%)	2.19	13755: 2008
Abrasion Resistance (mm)	17.5	14157: 2017
Flexural Strength (Mpa) Mean	10.9	12372: 2006
Compressive Strength (Mpa) LEV	119	1926: 2006
Freeze thaw: Before / After (Mpa)	10.9/10.1	12371: 2010
Slip Resistance Sawn Dry/Wet	95/84	14231: 2003
Slip Resistance Shot Sawn Wet	84	14231: 2003
Open Porosity (%)	7.53	1936: 2006

**British Standards:**

Paving, Setts and Kerbs are CE marked to BS EN 1341, 1342 and 1343.

**Tolerances:**

Stone dimensions are produced to meet class 1 specification as a minimum.

**Quality Control:**

Stone supplied in accordance with ISO 9001 quality standards.

**Maintenance:**

Clean warm water with natural soap would be the most common method of cleaning the stone.

We also offer a wide range specialist cleaning products and impregnators. Please contact our technical department for any further information.

*Inspiring beautiful landscapes*