



Grey Yorkstone Technical Data Sheet


CED Stone Group
 728 London Road, Grays,
 Essex RM20 3LU
 technical@cedstone.co.uk
 estimators@cedstone.co.uk
 sales@cedstone.co.uk
 01708 867 238
www.cedstone.co.uk
 Company Reg. No. 624843

Product Code:
 S35-2198-2806

Stone Classification
 Quartzitic Sandstone

Source
 England

Date Created: 23/02/20

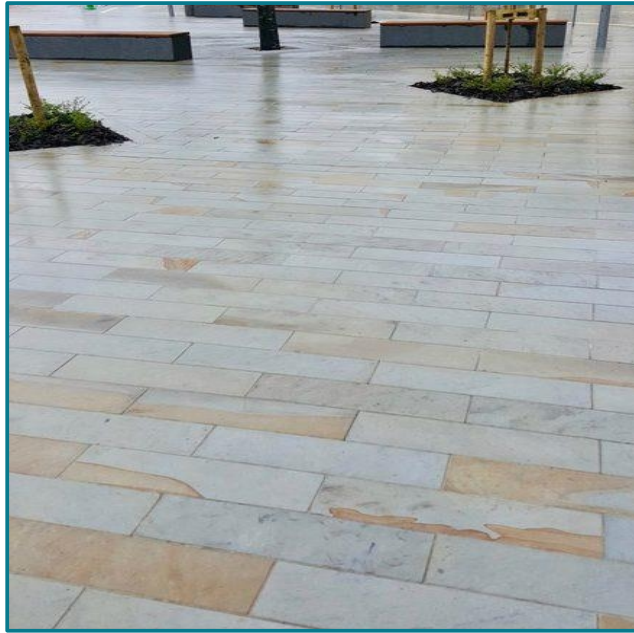

Please note:

Image shows sawn tonality variation and finish; Natural variations may occur between image and finished product.



Test	Value	BS EN
Apparent density (g/cm ³)	2.39	1936: 2006
Water Absorption (%)	2.9	13755: 2008
Abrasion Resistance (mm)	20	14157: 2017
Flexural Strength (Mpa) LEV	10	12372: 2006
Flexural Strength (Mpa) Mean	15.5	12372: 2006
Compressive Strength (Mpa) LEV	125.2	1926: 2006
Compressive Strength (Mpa) Mean	134.5	1926: 2006
Freeze thaw: Before / After (Mpa)	15.5/15	12371: 2010
Slip Resistance Flame Textured Dry/Wet	91/81	14231: 2003
Open Porosity (%)	8.9	1936: 2006

British Standards:

Paving, Setts and Kerbs are CE marked to BS EN 1341, 1342 and 1343.

Tolerances:

Stone dimensions are produced to meet class 1 specification as a minimum.

Quality Control:

Stone supplied in accordance with ISO 9001 quality standards.

Maintenance:

Clean warm water with natural soap would be the most common method of cleaning the stone.

We also offer a wide range specialist cleaning products and impregnators. Please contact our technical department for any further information.

Inspiring beautiful landscapes.