


Flexicurtain[®]

industrial curtain



Flexicurtain is a **retractable PVC industrial curtain wall** or access point solution. Primarily used as a curtain to provide **quick temporary division** of an internal area to **prevent contamination** and **overspray during washdown**, or to restrict airflow and manage temperature.

It can also be used to **create booths, access points** and **divide large areas** where regular access is required. Used externally Flexicurtain can provide accessible entry on canopies and enclosures.



Prevent Cross Contamination



Protect Employees



Quick to Deploy



Fire Rated Material Options Available



Antibacterial Materials




Customised to Meet Business Needs




Features and Benefits

| | |
|--|--|
| Quick installation process | <ul style="list-style-type: none"> Minimal impact to existing production schedules |
| Designed and manufactured to any height and length | <ul style="list-style-type: none"> Works in any environment - ideal for tall buildings Create customised solutions to suit your building and existing setup |
| Antibacterial materials available | <ul style="list-style-type: none"> Product suitable for companies adhering to BRC Create quick to deploy washdown curtains between production lines |
| External solutions available (with optional windload straps) | <ul style="list-style-type: none"> Create canopy enclosures and access solutions Protect employees from the weather |
| Resistance tested | <ul style="list-style-type: none"> Use in areas where regular cleaning is required and overspray needs to be contained Curtains can be washed down in dusty environments |
| Zinc plated or stainless steel tracks and component options | <ul style="list-style-type: none"> Create systems that suit budget and environment Rust resistant materials |
| Manufactured in the UK | <ul style="list-style-type: none"> Quick turnaround |


Installation



Flexicurtain is hung and runs on a rail which is installed bespoke, depending on the environment and what existing structure is available.

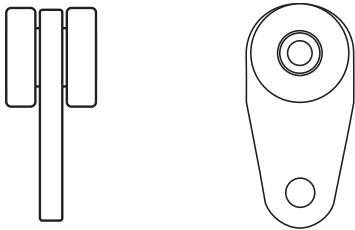

Westgate's unique trolleys sit in the rail and provide a smooth run.

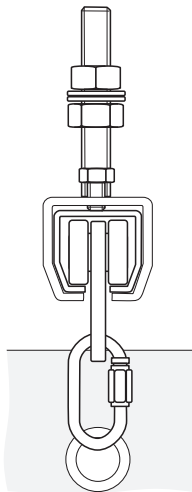

Your chosen Flexicurtain material is then hung from the trolleys to create a retractable industrial curtain.

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice.

J232-WFD-PFS-FC-260924 © Westgate Global Ltd

Technical Specifications

| | |
|-------------------------------|---|
| Material Composite | Main product is polyester reinforced fire-retardant fabric with PVC coatings. We also supply a non-combustible woven glass fabric with PU coating <small>(*range of base fabric and coatings depending on your requirements)</small> |
| Material Weight | between 340gsm-840gsm |
| Tensile Strength | between 340N-3400N / 50mm |
| Tear Strength | between 80N-850N |
| Material Fire Rating Examples | BS 5867:2008 Part 2 Type A & B, Warrington Certifire TS62 & TS63, EN13501-1 A2s1d0, EN13501-1 Bs1d0, EN13501-1 Cs2d0 <small>(*subject to material specification, all fire ratings supplied at quote stage)</small> |
| Operating Temperature | between -40 / +70 degree centigrade <small>(*dependent on fabric type)</small> |
| Sound Reduction | between 11dB - 13dB |
| Thermal Resistance | between 5.52 - 5.40 W/m ² K |

Using a range of fire rated PVC materials, Flexicurtain is customised with a number of options including; vision panels, stainless steel tracks, suspended tracks, single run or bi-parting applications, wind load straps (external applications) - with manual operation.

