

CLD Securus S4

High security fencing system to LPS 1175 D10 (SR4) Issue 8 (Also rated to E3 & G1)




Description

Securus is CLD's range of specialist security fencing. Traditionally referred to as prison mesh or 358 mesh, the Securus range has been updated to allow complete flexibility – the panels can be swapped out to change the security rating as the needs of the site change. Securus S4 has been certified by the Loss Prevention Certification Board to provide a minimum of 10 minutes delay against attack.



Find out more
Scan for more information

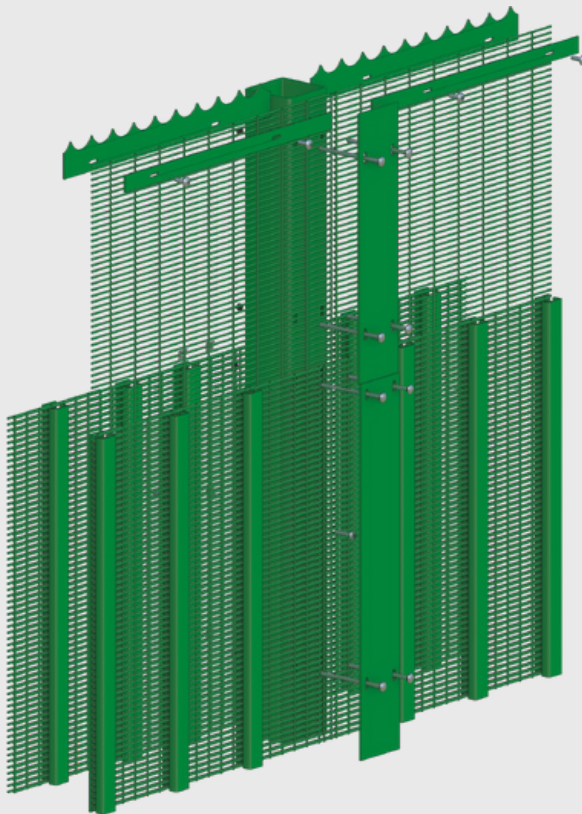

Features

Double cassette (front & rear)

Tested and certified to LPS 1175 D10 (SR4)

Base plate and ground bury options available

Ideal for Data Centres, MoD, Utilities, Ports & Airports

Exploded view of post and fixing details for the CLD Securus S4
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD Securus S4


High security fencing system to LPS 1175 D10 (SR4) Issue 8 (Also rated to E3 & G1)



Product Technical Information

Standard	LPS 1175 D10 (SR4) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2022 BS EN 13438:2013 Secured By Design
Panel Type	Double layered mesh cassette system. Mesh and wire. Double layered mesh cassette system. Galvanised and powder coated to minimum 80 microns dft.
Panel Width	2518mm
Wire diameter	4mm
Mesh size	76.2 x 12.5 mm
Available heights	2880mm to 5000mm
Nominal Heights	2.8m to 5.0m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	Nil
Panel Installation	Bottom of panel minimum 100mm below ground or option for maximum 50mm above ground. Base plated and no ground bury options also available.
Security Topping Options	Barbed and razor wire, cranked and straight
Post Dimensions	120mm x 120mm
Post Centres	2530mm +/- 9mm
Posts	SHS, galvanised after manufacture and polyester powder-coated to match fencing
Fixings	120mm x 5mm full length clamp bar. M8 case hardened self-tapping screws and M8 stainless steel cup square bolt (min 160mm) Washers and nyloc nuts.
Foundations	Set posts in holes minimum 450mm square x 950mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.
Warranty	Minimum of 15 years against manufacturing defects.


System Details



Plan of end post



Plan of panels in line



Plan of external corner

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Securus_S4_DS_20240808