

CLD Dulok 25 S1

Double wire panel system to LPS 1175 A1 (SR1) Issue 8



Find out more
Scan for more information

Description

CLD Dulok is a highly versatile mesh fencing system, which offers an aesthetic and cost-effective solution where visibility is required. This security-rated version of Dulok features twin 8mm horizontal wires either side of the 6mm vertical wire (traditionally known as 868), and no visible fixings, slowing down potential intruders



Features

High security anti-cut double wire panels

Secured by Design accredited system

Smaller aperture of 25mm making it more difficult to climb or cut

Exploded view of post and fixing details for the CLD Dulok 25 S1
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD Dulok 25 S1

Double wire panel system to LPS 1175 A1 (SR1) Issue 8

Product Technical Information

Standard	LPS 1175 A1 (SR1) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2022 BS EN 13438:2013 Secured by Design - Police Preferred Specification
Panel Type	Mesh and wire. Single vertical and double horizontal wires.
Panel Width	2508mm
Wire Diameter	6mm verticals and twin 8mm horizontals or 5mm verticals and twin 6mm horizontals.
Mesh size	200 x 25mm
Fixings	40mm x 5mm full length clamp bar. M8 x 40mm Sheardrive™
Available Heights	1830mm to 5070mm. Heights of 3030mm and above are made up of 2 or more panel
Nominal Heights	1.8m to 5m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	30mm
Panel installation	Bottom of panel maximum 50mm above ground
Topping Options	Options available on request
Posts	RHS, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	80mm x 40mm to 120mm x 60mm depending on height of panel
Post Centres	2520mm
Foundations	Set posts in holes minimum 300mm square or 400mm diameter x 800mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence
Warranty	Minimum of 15 years against manufacturing defects.

System Details

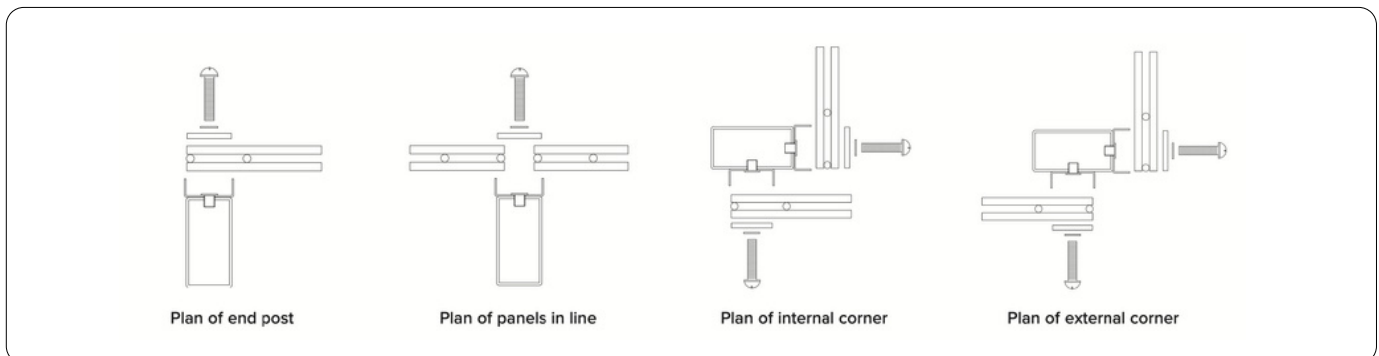

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Dulok_25_S1_DS_20231208