

CLD LockMaster S3 Auto

Automatic Swing Gates to LPS 1175 C5 (SR3) Issue 8



Physical
Security
Systems



Find out more
Scan for more information

Description

CLD's LockMaster S3 Auto swing gates have been specially designed to blend seamlessly with a CLD Securus fence line. Available using Securus S3 infill panels, LockMaster S3 offers security rated access whilst maintaining aesthetics. This automatic version of our LockMaster gates features a low voltage motor for intensive use. LockMaster S3 has been tested by the Loss Prevention Certification Board (LPCB) to guarantee a minimum delay of 5 minutes against attack.

Features

High security LPS 1175 Issue 8 C5 (SR3) rating

Automated security system

Full range of RAL colours available



Exploded view of post and fixing details for the CLD LockMaster S3 Auto
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD LockMaster S3 Auto

Automatic Swing Gates to LPS 1175 C5 (SR3) Issue 8

Product Technical Information

Standard	LPS 1175 BS1722-14:2017 BS EN ISO 1461: 2022 BS EN 13438:2013 Secured By Design
Description	Open mesh steel high security gate system with mesh infill, to match fencing
Panel Options	Panel infill to match CLD Securus S3
Panel Width	To suit mesh infill panels: Double leaf: 2400mm to 10000mm maximum
Available Heights	2440mm to 5000mm to match fence panel, Single leaf gates above 3000mm have lintel panel
Nominal heights	2.4m to 5.0m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Post Dimensions	150mm x 150mm minimum
Foundations	Post baseplate fixed to suitable concrete foundation 100mm below finished ground level. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Configuration	Double leaf, inward opening only
Gate Frame	To suit mesh infill panels: Vertical stiles: minimum of 50mm x 50mm x 3mm SHS & 100mm x 50mm x 3mm RHS Horizontal rails: minimum of 50mm x 50mm x 3mm SHS & 100mm x 50mm x 3mm RHS
Locking	Electromechanical Gate Lock & hydraulic arms
Hinges	3 x Superhinge 25mm Min
Warranty	Gate: Minimum of 15 years against manufacturing defects. Auto-element: Minimum of 12 months.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

System Details

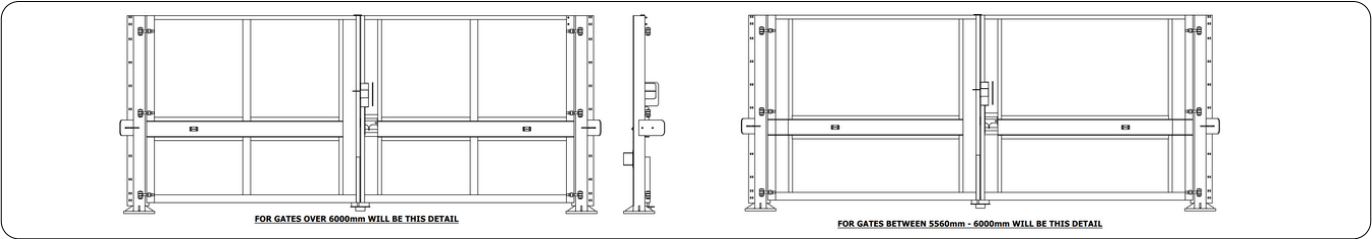

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_LockMaster_S3_Auto_DS_20231205