

three-level horizontal bars



Age indication



Fitness



Balance





Social skills

Scope of delivery


4x posts: galvanised and powder-coated steel

3x horizontal bars: stainless steel

4x post cover: PA6

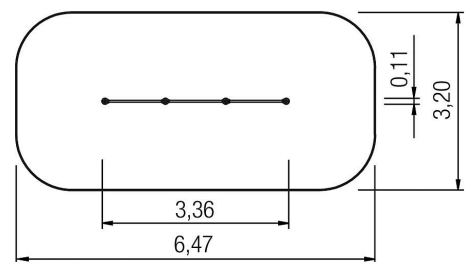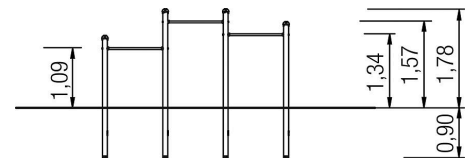



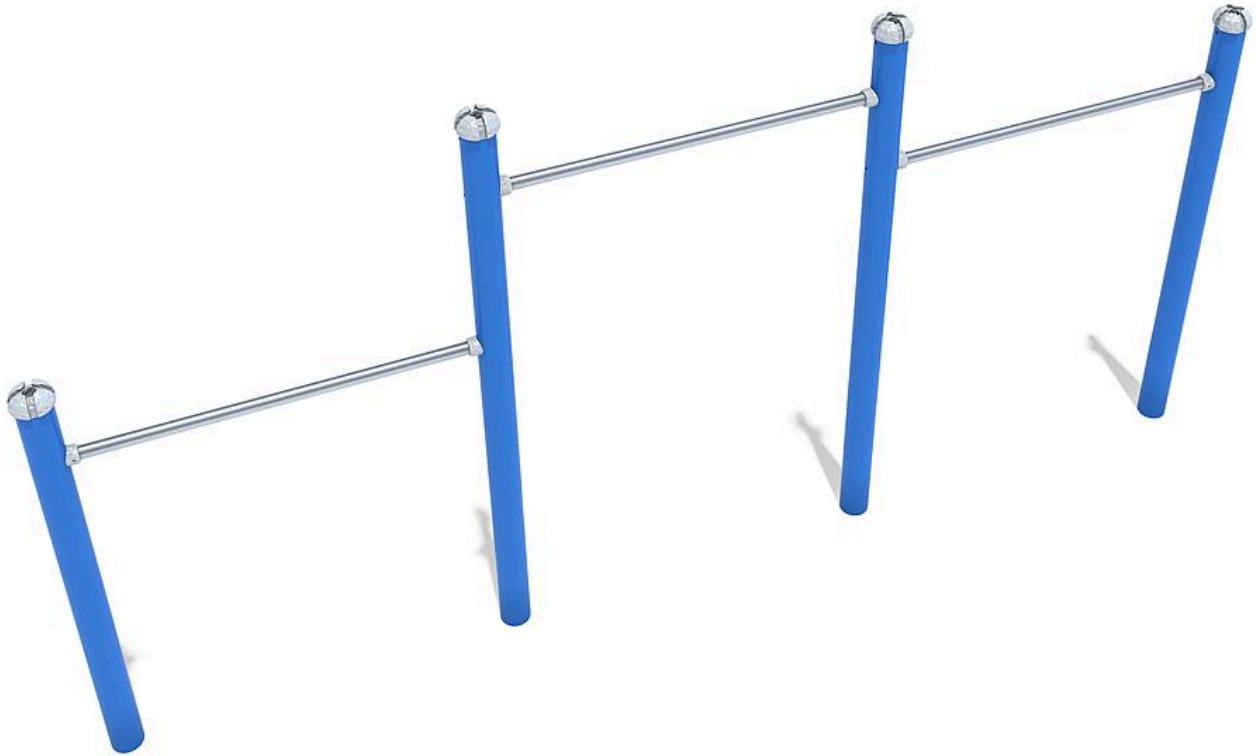








three-level horizontal bars



Technical data

	Material	powdered steel
	Minimum space	6,47x3,20x3,78 m
	Impact protection net	20,0 m ²
	Free falling height	157 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	Largest section	238x9x9 cm
	Heaviest section	22 kg
	mx. number of users	3
	Certificate	TÜV product service
	Tested according to standard	-
	Service interval (in months)	6

Installation information

	Foundations	4x CF
	Fundamentlevel	ET 900
	Assembly	2 persons/2.5 h
	PF Accessories	-
	PF drainage	-
	PF concrete	-
	PF excavation	-
	CF Accessories	-
	CF drainage	-
	CF concrete	0,74 m ³
	CF excavation	1,22 m ³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height