


play unit Runout



Age indication

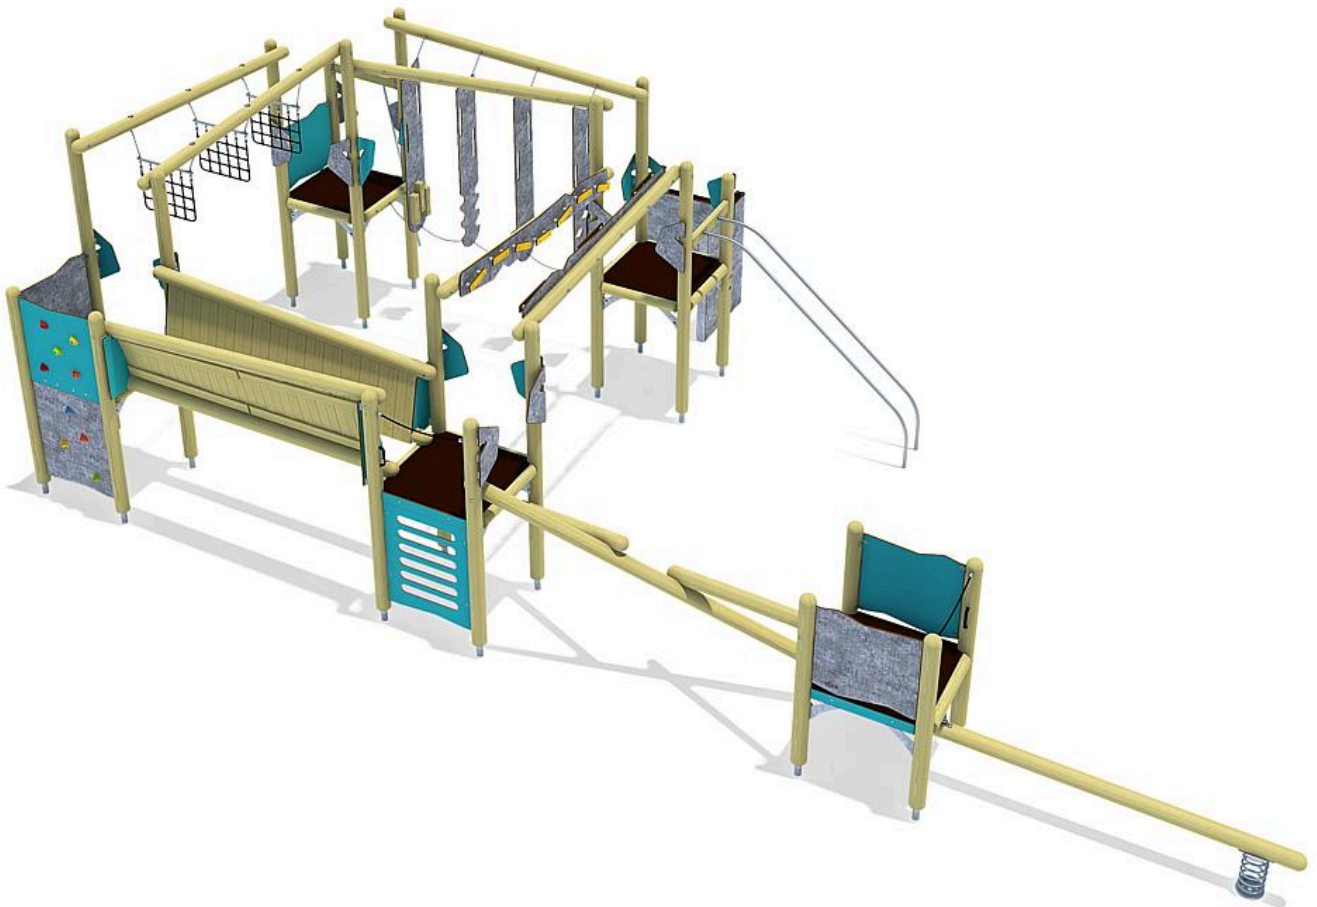

Fitness



Balance





Speed


Scope of delivery

20x post construction: softwood or steel
 5x platform: high-pressure-laminate (HPL)
 5x platform construction: hot-dip galvanised steel
 5x frame trim: high-pressure laminate (HPL)
 1x balancing beam with spring: softwood, stainless steel (V2A), spring steel
 1x handrail slide: stainless steel (V2A)
 1x climbing board: high-pressure-laminate (HPL), glass fibre reinforced plastic (GFRP)
 1x climbing board: high-pressure-laminate (HPL), glass fibre reinforced plastic (GFRP)
 1x climbing board: high-pressure-laminate (HPL)
 1x climbing pole: stainless steel (V2A)
 1x hanging nets: softwood, plastic-coated steel cable
 1x boulder line: softwood, high-pressure-laminate (HPL)
 1x climbing path: softwood, high-pressure-laminate (HPL)
 1x hanging doors: softwood, chain hanger (V2A), high-pressure-laminate (HPL)
 1x zigzag crossover: softwood
 4x parapet: high-pressure-laminate (HPL)
 2x passage safety device: plastic-coated steel cable, stainless steel (V2A)



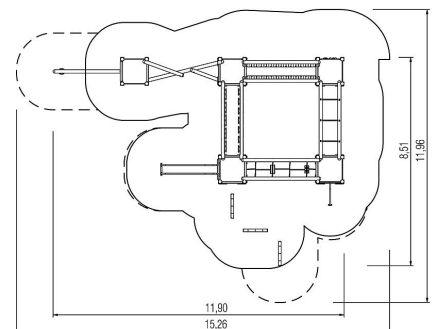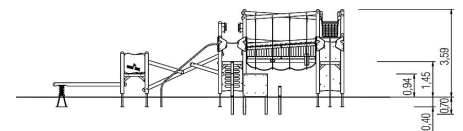



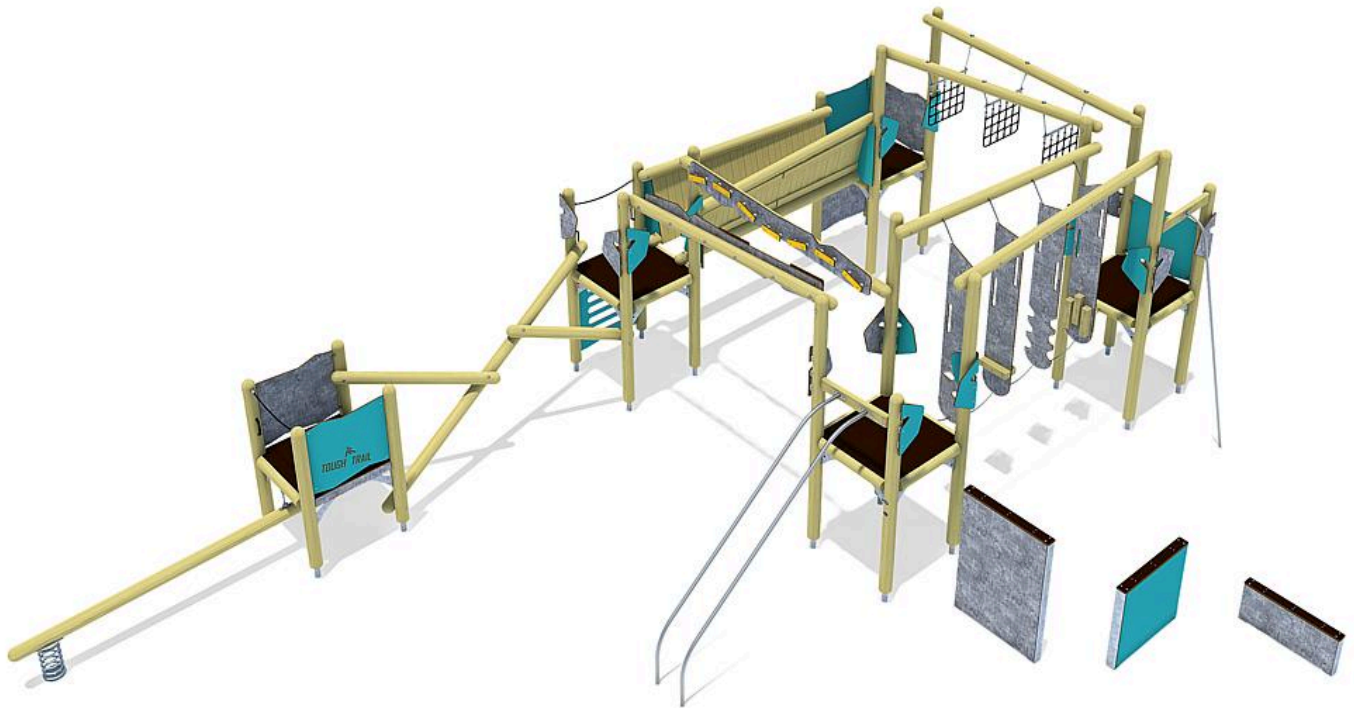



1x balancing wall PH 1450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x balancing wall PH 450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x balancing wall PH 950: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 2x grip set: aluminium, coated
 fittings: stainless steel (V2A)














play unit Runout



Technical data

	Material	SW pi
	Minimum space	15,27x11,95x4,08 m
	Impact protection net	97,5 m ²
	Free falling height	228 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	53
	Certificate	Z2_010651_0527_Rev00
	Tested according to standard	EN 1176 - 1/3/7
	Service interval (in months)	1

Installation information

	Foundations	26x CF or 4x CF + 22x PFs
	Fundamentlevel	ET 400/700
	Assembly	4 persons/15 h
	PF Accessories	22x 5632540
	PF drainage	0,32 m ³
	PF concrete	1,22 m ³
	PF excavation	7,54 m ³
	CF Accessories	23x 5631120
	CF drainage	0,32 m ³
	CF concrete	2,30 m ³
	CF excavation	5,03 m ³



5 25 703 011 00

play unit Runout



CO₂ emissions of the product

4046,6 kg

Material share of renewable raw materials

54%

Recyclate content

18%

Circularity score



Weighted emission factor of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024