

play unit Scorpion Trail



Age indication



Fitness



Balance




Speed

Scope of delivery

42x post construction: softwood or steel
 9x platform: high-pressure-laminate (HPL)
 9x platform construction: hot-dip galvanised steel
 9x frame trim narrow: high-pressure-laminate (HPL)
 1x climbing chimney: softwood, high-pressure-laminate (HPL), stainless steel (V2A), glas fibre reinforced plastic (GFRP)
 1x climbing board: high-pressure-laminate (HPL), glas fibre reinforced plastic (GFRP)
 4x climbing platform with grips: high-pressure-laminate (HPL)
 1x ramp: softwood, high-pressure-laminate (HPL), stainless steel (V2A)
 1x sliding pole: stainless steel
 1x shimmy frame: softwood, plastic-coated steel cable, stainless steel (V2A)
 1x climbing path: softwood, high-pressure-laminate (HPL)
 1x chain swings: softwood, chain suspension (V2A)
 1x jump ramp: stainless steel (V2A)
 1x climbing wall: softwood, plastic-coated steel cable
 1x stork's gait: softwood, chain suspension (V2A), post connection (V2A), plastic-coated steel cable



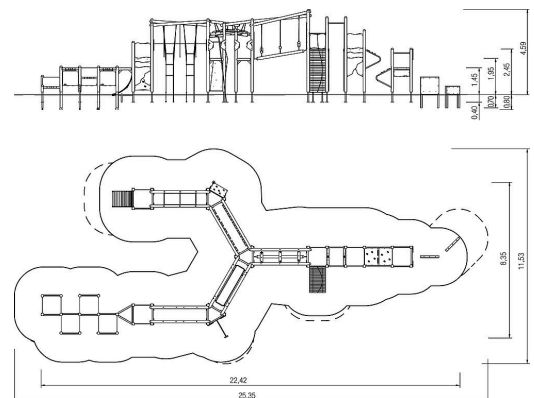







27x parapet: high-pressure-laminate (HPL)
 4x passage safety device: stainless steel (V2A)
 14x access restriction: high-pressure-laminate (HPL)
 1x balancing wall PH 450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x balancing wall PH 950: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x grip set: aluminium, coated fittings: stainless steel (V2A)














play unit Scorpion Trail



Technical data

	Material	SW pi
	Minimum space	25,35x11,53x4,64 m
	Impact protection net	154,5 m ²
	Free falling height	284 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	88
	Certificate	Z2_010651_0537_Rev00
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	53x CF or 42x PFs + 10x CF
	Fundamentlevel	ET 400/700
	Assembly	4 persons/12 h
	PF Accessories	42x 5632540
	PF drainage	0,39 m ³
	PF concrete	1,57 m ³
	PF excavation	12,95 m ³
	CF Accessories	43x 5631120
	CF drainage	0,39 m ³
	CF concrete	3,67 m ³
	CF excavation	8,25 m ³



5 25 712 011 72

play unit Scorpion Trail



CO₂ emissions of the product

8002,3 kg

Material share of renewable raw materials

45%

Recyclate content

19%

Circularity score



Weighted emission factor of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024