

# climbing structure Yuki



Age indication



Fitness



Balance



Social skills





Senses



Speed

## Scope of delivery



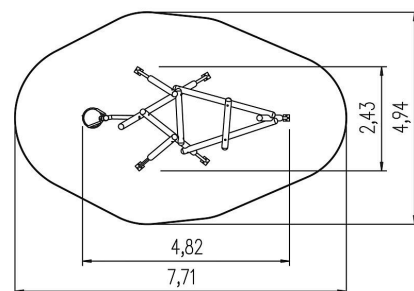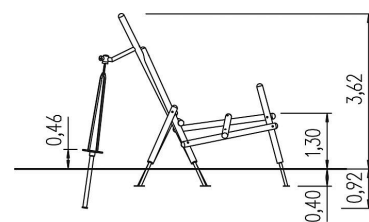





9x post structure: softwood  
5x post shoe: galvanised steel  
1x double whisk: stainless steel














# climbing structure Yuki



## Technical data

|   |   |                      |
|---|---|----------------------|
|  | Material                                  | SW pi                |
|  | Minimum space                             | 7,71x4,94x3,62 m     |
|  | Impact protection net                     | 28,5 m <sup>2</sup>  |
|  | Free falling height                       | 130 cm               |
|  | Ground constitution<br>GE/NL/B            | mind. Rasen          |
|  | Ground constitution<br>all except GE/NL/B | mind. Sand           |
|  | Largest section                           | Ø 14x468 cm          |
|  | Heaviest section                          | 60 kg                |
|  | Certificate                               | Z2_010651_0521_Rev00 |
|  | Tested according to<br>standard           | EN 1176 - 1/7        |
|  | Service interval (in<br>months)           | 3                    |

## Installation information

|   |                |                         |
|---|----------------|-------------------------|
|  | Foundations    | 6x CF or 5x PFI + 1 CF  |
|  | Fundamentlevel | ET 400/900              |
|  | Assembly       | 2 Personen/4 Std.       |
|  | PF Accessories | 5x 5630730 + 5x 5631120 |
|  | PF drainage    | 0,04 m <sup>3</sup>     |
|  | PF concrete    | 0,20 m <sup>3</sup>     |
|  | PF excavation  | 4,60 m <sup>3</sup>     |
|  | CF Accessories | 5x 5631120              |
|  | CF drainage    | 0,04 m <sup>3</sup>     |
|  | CF concrete    | 0,90 m <sup>3</sup>     |
|  | CF excavation  | 1,62 m <sup>3</sup>     |



5 25 908 011 00

# climbing structure Yuki



**CO<sub>2</sub> emissions of the product**

**611,5 kg**

**Material share of renewable raw materials**

**68%**


**Recyclate content**

**30%**

Circularity score



Weighted emission factor of the product\*

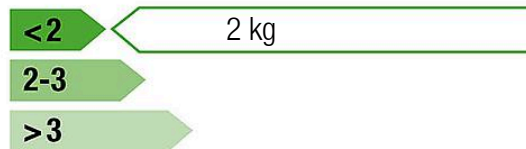

**Disclaimer:**

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at [gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/](https://gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/).

\* The CO<sub>2</sub>e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024