

Spring rocker Fox



Age indication




Balance

Scope of delivery

1x spring rocker body Fox: HPL, galvanised steel

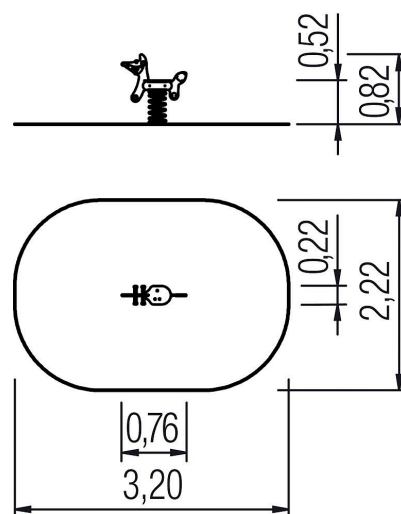

1x spring: spring steel









Spring rocker Fox



Technical data

	Material	HPL
	Minimum space	3,20x2,22x2,32
	Impact protection net	6,5 m ²
	Free falling height	52 cm
	Ground constitution GE/NL/B	at least lawn
	Ground constitution all except GE/NL/B	at least lawn
	Largest section	0,77x0,56x0,22 m
	Heaviest section	15,5 kg
	mx. number of users	1
	Tested according to standard	EN 1176 - 1/6/7
	Service interval (in months)	3



Installation information

	Foundations	1x 5632280 + 1x CF or 1x 5632290
	Fundamentlevel	ET 0
	CF Accessories	1x 5632280 oder 1x 5632290
	CF drainage	0,04 m ³
	CF concrete	0,06 m ³
	CF excavation	0,20 m ³



5 67 272 150 37

Spring rocker Fox

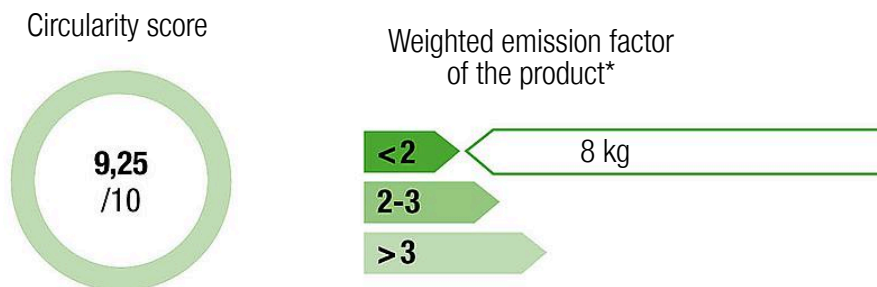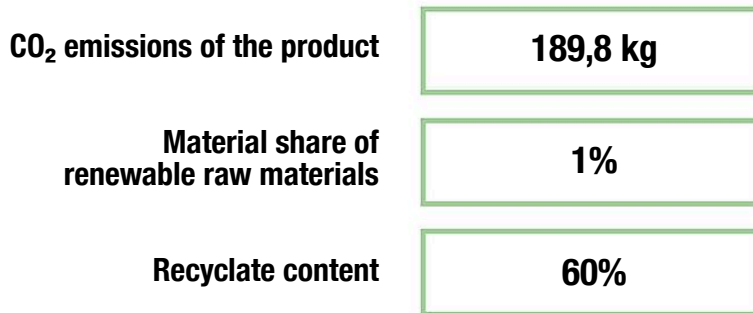

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024