

play unit Carin, solo



Age indication



Fitness



Social skills





Speed



Balance

Scope of delivery



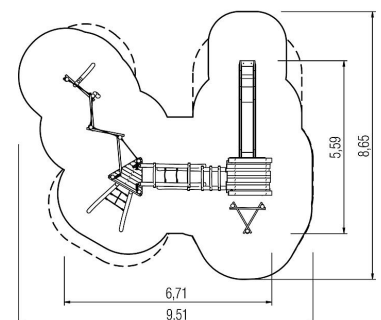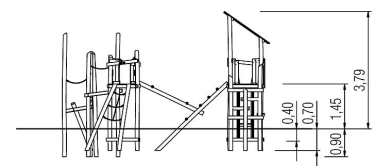






- 7x post unit: robinia
- 2x platform unit: robinia
- 1x sloped boarded roof: robinia
- 1x square timber ascent: robinia, plastic-coated steel rope
- 1x net ascent: robinia, plastic-coated steel rope
- 1x triangular ascent: robinia
- 1x crossed rungs bridge: robinia, plastic-coated steel rope
- 2x access restriction: robinia
- 1x parapet: robinia
- 1x slide entry board: robinia
- 1x walk-through protection: robinia
- 1x counter: robinia
- 1x set of climbing grips: aluminium, plastic-coated
- 7x squared timber: robinia














play unit Carin, solo




Technical data

	Material	Robinia natural
	Minimum space	9,51x8,65x3,79 m
	Impact protection net	55,0 m ²
	Free falling height	145 cm
	Ground constitution GE/NL/B	at least turf
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	27
	Certificate	Z2_010651_0524_Rev00
	Tested according to standard	EN 1176 - 1/3/7

Installation information

	Foundations	18x CF
	Fundamentlevel	ET 700
	Assembly	2 persons/10 h
	PF Accessories	-
	PF drainage	-
	PF concrete	-
	PF excavation	-
	CF Accessories	-
	CF drainage	0,65 m ³
	CF concrete	1,94 m ³
	CF excavation	5,18 m ³

Accessories

-  Slides for platform heights: 1x 145 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.



5 45 326 063 00

play unit Carin, solo



CO₂ emissions of the product

231,7 kg

Material share of renewable raw materials

99%


Recyclate content

1%

Circularity score



Weighted emission factor of the product*

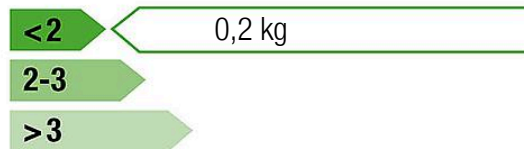

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024