

play unit Dom, solo



Age indication



Speed



Fitness



Fine motor skills





Social skills



Inclusion

Scope of delivery



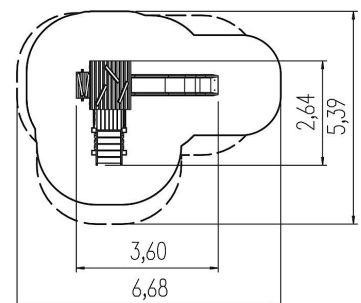







8x post construction: softwood or steel
 8x post shoe: steel galvanised
 2x platform construction: softwood
 2x parapet: softwood
 2x parapet: high pressure laminate (HPL)
 7x decoration crossbar: softwood
 2x protective device clamping of hood cord: high pressure laminate (HPL)
 1x pent roof: softwood
 1x ramp: softwood
 1x slide entry plate: high pressure laminate (HPL)
 1x play panel gear wheel: high pressure laminate (HPL)
 1x staircase: softwood
 1x access restriction: high pressure laminate (HPL)
 fittings: stainless steel














play unit Dom, solo



Technical data

	Material	SW pi
	Minimum space	5,71x5,40x3,00 m
	Impact protection net	21,0 m ²
	Free falling height	95 cm
	Ground constitution GE/NL/B	at least turf
	Ground constitution all except GE/NL/B	at least turf
	Largest section	0,15x0,15x3,42 m
	mx. number of users	19
	Certificate	Z2_010651_514_Rev00
	Tested according to standard	EN 1176 - 1/3/7

Installation information

	Foundations	10x CF or 7x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/8 h
	PF Accessories	7x 5632540
	PF drainage	-
	PF concrete	-
	PF excavation	1,60 m ³
	CF Accessories	10x 5631120
	CF drainage	-
	CF concrete	0,48 m ³
	CF excavation	1,12 m ³

Accessories

-  Slides for platform heights: 1x 95 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.



5 11 502 011 00

play unit Dom, solo



CO₂ emissions of the product

538,2 kg

Material share of renewable raw materials

79%


Recyclate content

11%

Circularity score



Weighted emission factor of the product*

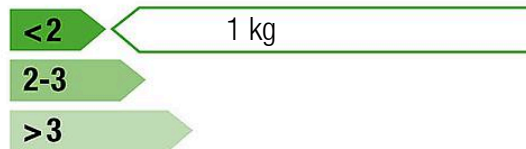

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024