








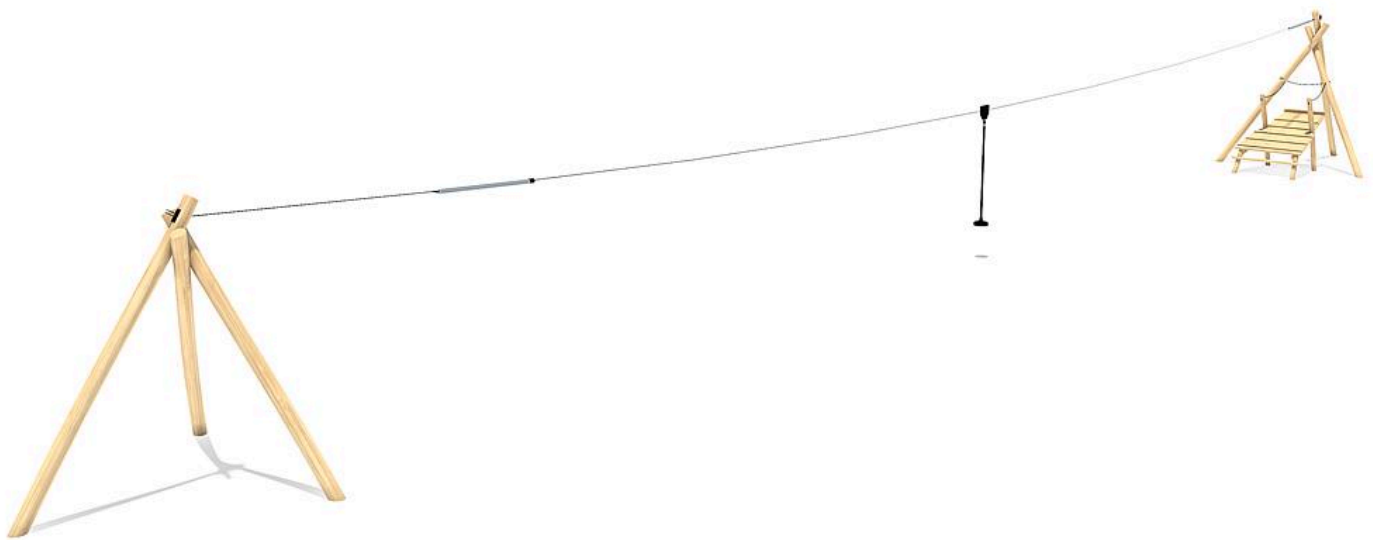

aerial cableway Tardo with start platform 30 m



Technical data

	Material	Robinia natural
	Minimum space	37,18x6,60x3,92 m
	Impact protection net	121,0 m ²
	Free falling height	144 cm
	Ground constitution GE/NL/B	at least lawn
	Ground constitution all except GE/NL/B	at least sand
	Size	length 30 m
	mx. number of users	1
	Certificate	Z2_010651_0525_Rev00
	Tested according to standard	EN 1176 - 1/4/7

Installation information

	Foundations	10x CF
	Fundamentlevel	ET 1000
	Assembly	3 persons/7 h
	Lifting devices	Excavator
	PF Accessories	-
	PF drainage	-
	PF concrete	-
	PF excavation	-



5 45 125 063 00

aerial cableway Tardo with start platform 30 m



CO₂ emissions of the product

429,9 kg

Material share of renewable raw materials

96%

Recyclate content

3%

Circularity score



Weighted emission factor of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024