

CLD LockMaster S1

Swing Gate System to LPS 1175 A1 (SR1) Issue 8



Find out more
Scan for more information

Description


CLD LockMaster S1 swing gates have been specially developed to blend in seamlessly with a CLD fence line. Available in different mesh options Dulok S1 and Dulok 25 S1, Securus S1 and Ultimate Extra S1, they offer security rated access control, whilst maintaining aesthetics. Rigorously tested by the Loss Prevention Certification Board (LPCB) to guarantee a minimum delay of 60 seconds against attack, LockMaster S1 is also Secured by Design accredited, making it a police preferred specification for security.

Features

Available in different mesh options to match fence line

Double or single leaf opening

Rear or centre hung

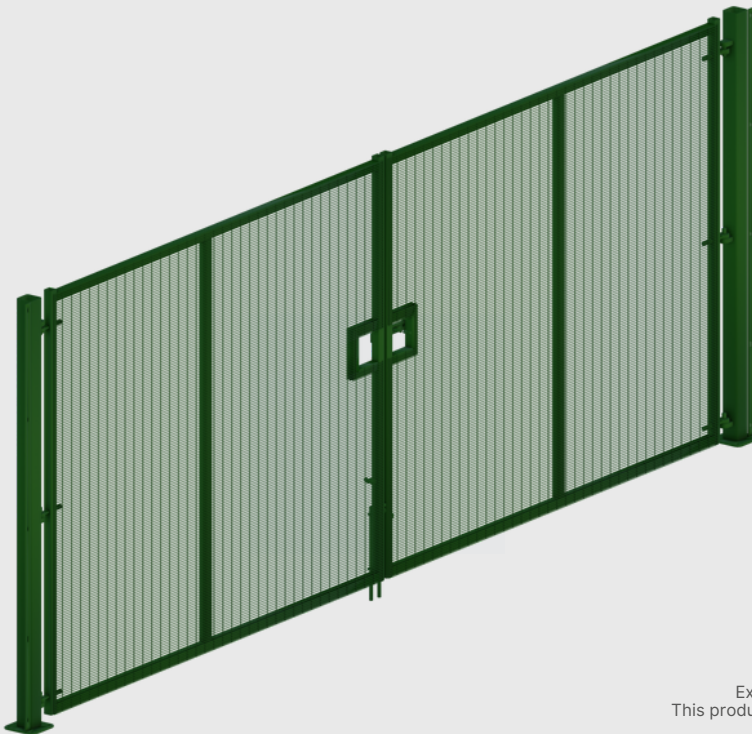

Exploded view of post and fixing details for the CLD LockMaster S1
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD LockMaster S1

Swing Gate System to LPS 1175 A1 (SR1) Issue 8

Product Technical Information

Standard	LPS 1175 A1 (SR1) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Secured by Design - Police Preferred Specification
Description	Open mesh steel high security gate system with mesh infill, to match fencing
Infill Panel Options	Options to be chosen from the following fencing systems (see fencing Q40 specification sheets for information) CLD Securus S1, CLD Dulok S1, CLD Dulok 25 S1, CLD Ultimate Extra S1
Panel Width	To suit mesh infill panels: Single leaf: 500mm minimum to 3000mm maximum Double leaf: 1000mm to 8000mm maximum
Available Heights	1830mm to 3030mm to match fence panel. Select as required
Nominal Heights	1.8m to 3m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Post dimensions	80mm x 80mm minimum
Fixings	41 x 21mm channel with SafeTFix to rear
Foundations	Set posts in holes 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Configuration	Double leaf/ single leaf / rear hung or centre hung as required
Gate Frame	To suit mesh infill panels: Vertical stiles: minimum of 50mm x 50mm SHS Horizontal rails: minimum of 40mm x 40mm SHS
Locking	Slide bar with certified padlock
Hinges	3 x CLD hinge sets with M20 eye bolts
Warranty	Minimum of 15 years against manufacturing defects
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_LockMaster_S1_DS_20230504