

# CLD LockMaster SR3 Panic Out

Emergency Exit Gate to LPS 1175 SR3 Issue 7



Physical Security Systems




## Description

CLD LockMaster SR3 Panic Out gate was the first emergency exit gate in the world rated SR3. Designed to be used in the most secure locations, gates are protected by CLD Securus mesh and vertical bars, ensuring resistance against even the most determined attackers. Rigorously tested by the Loss Prevention Certification Board (LPCB) to guarantee a minimum delay of 5 minutes against attack, LockMaster SR3 Panic Out also has Secured by Design accredited, making it a police preferred specification for security.



Find out more  
Scan for more information

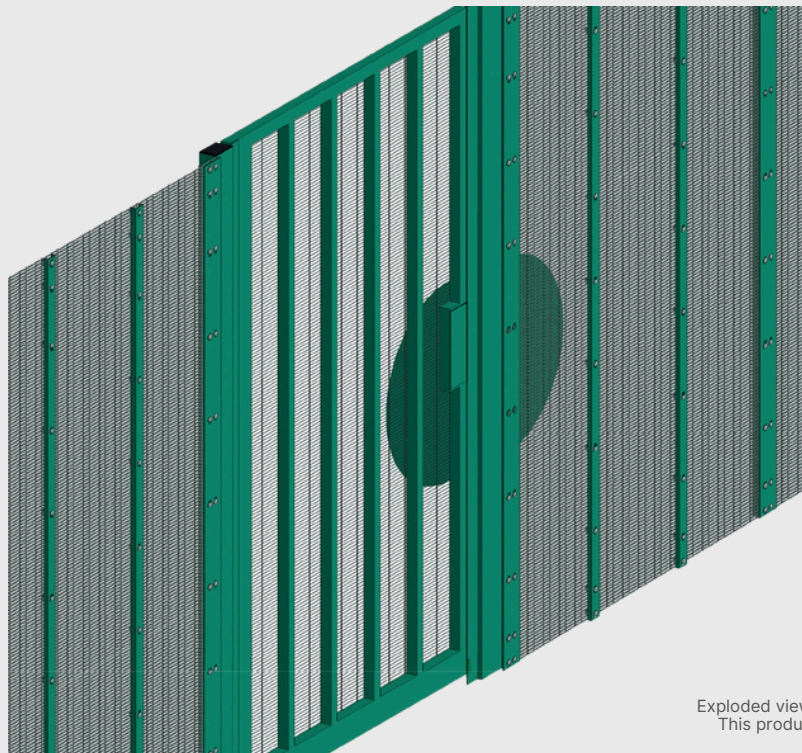

## Features

Matches CLD Securus fenceline

Double/single in/out opening

High Security Emergency Exit rated gates

Exploded view of post and fixing details for the CLD LockMaster S3 Panic Out  
This product has additional features not demonstrated for security reasons



cld-systems.com

# CLD LockMaster SR3 Panic Out

Emergency Exit Gate to LPS 1175 SR3 Issue 7

## Product Technical Information

|                          |  |
|--------------------------|--|
| <b>Standard</b>          | LPS 1175<br>BS1722-14:2017<br>BS EN ISO 141:2009<br>BS EN 13438:2013<br>Secured By Design  |
| <b>Description</b>       | Mesh steel high security gate system with mesh infill  |
| <b>Panel Options</b>     | CLD Securux mesh fixed with non-removable security fixings   |
| <b>Panel Width</b>       | 1480mm   |
| <b>Available Heights</b> | 2350mm   |
| <b>Nominal heights</b>   | 2.4m   |
| <b>Finish</b>            | Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available  |
| <b>Post Dimensions</b>   | 80mm x 80mm x 80mm Welded frame with 80 x 6mm flanges for fixing fencing minimum   |
| <b>Foundations</b>       | Set posts in holes 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions   |
| <b>Configuration</b>     | Single leaf opening outwards only  |
| <b>Gate Frame</b>        | 100 x 50mm steel frame all welded and drilled prior to hot dip Galvanised and powder-coated to match fencing   |
| <b>Locking</b>           | MICO Abryll Range of single point lock, surface fitted with Panic & Emergency.<br>MICO external locking attachment cylinder guards USCH3   |
| <b>Hinges</b>            | 3 x hinge sets with min M20 eye bolts  |
| <b>Warranty</b>          | Minimum of 15 years against manufacturing defects.   |
| <b>Notes</b>             | All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice. |

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_LockMaster\_SR3\_Panic\_Out\_Gates\_DS\_20230626