

CLD Securus Rail


Profiled Panel System



Find out more
Scan for more information

Description

CLD Securus Rail profiled mesh panel system offers an aesthetically pleasing solution whilst ensuring a robust first line of defence. From 2 to 3 profiles are available to enable easy transition between fence heights. Designed for quick & simple installation, including up and down slopes, Securus Rail mesh fencing panels are held in place by CLD's unique hidden fixing system, SafeTFix. Tested to last 30 years without any discernible deterioration in typical European weather conditions.

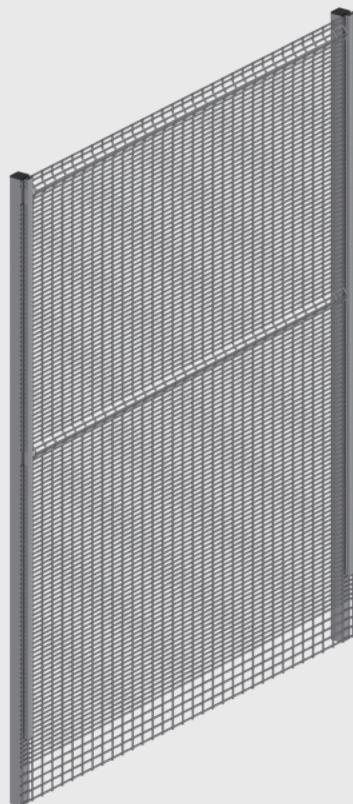

Features

Protected with 30 year life coating

Varying ground bury arrangements available

Interchangeable with various fence heights

Bottom apertures designed to allow safe passage for small wildlife

Exploded view of post for the CLD Securus Rail
This product has additional features not demonstrated for security reasons

CLD Securus Rail


Profiled Panel System

Product Technical Information

Standard	BS1722-14: 2017 BS EN ISO 1461:2022 BS EN 13438:2013
----------	------------------------------------------------------------

Panel Type	Profiled mesh panel system. Number of profiles varies according to height.
Panel Width	2518mm
Wire Diameter	4mm
Mesh size	76.2 x 25.4mm (variable options to suit anti-bury)
Fixings	41mm x 21mm clamping channels and CLD SafeTFix hidden fixing system
Available Heights	1800, 2000, 2100, 2400, 3000mm (up to 5000mm)
Nominal Heights	1.8m to 3m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available. Available in corten
Top Edge Projection	25mm
Panel installation	Bottom of panel buried by minimum 300mm
Topping Options	Barbed and razor wire, cranked and straight
Posts	SHS, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Dependant upon application
Post Centres	2440mm
Foundations	Set posts in holes minimum 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.
Warranty	Minimum of 30 years against manufacturing defects.

System Details

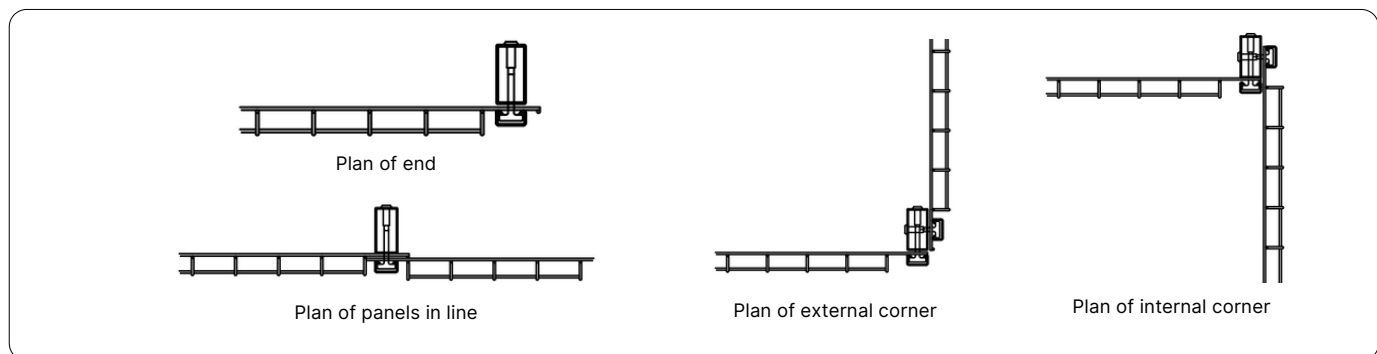

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_SecurusRail_DS_20230316