




Kanopé

(technical specification)

J56105



- 1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.

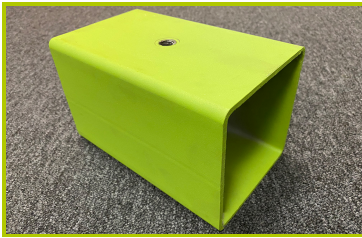


- 2- **The 120 x 120mm posts** are made of painted galvanised steel, ensuring robustness and durability.



- 3- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



- 4- **The slatted fences** are produced using post-consumer waste, mainly recycled food and drinks containers (polyethylene, aluminium). This environmental impact reducing material is an inert and robust compound which is hard-wearing, resistant to UV light and fluctuations in temperature, and able to retain its shape over time. It is also rot-proof, making it a reliable option for outdoor applications.

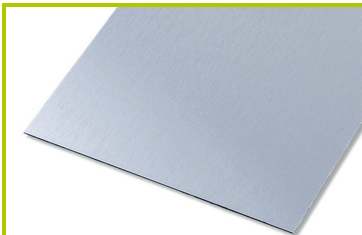

- 5- **The wall panels** are made of 3mm perforated aluminium sheet coated with a polyester epoxy lacquer.



- 6- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



7- The panels are made of stainless steel mesh netting, Ø 6mm.



8- The 16mm diameter ropes are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



9- The net fittings are made of polyamide. The fittings are composed of two distinct parts for ease of maintenance of individual strands.



10-The net fittings are made of polyamide and are used to link three cords together.




11-The footrests are made from rubber, 14mm thick.



12-The slides are made of rotomoulded polyethylene.



13-The gangway floor is made of solid wood planks, with rubber elements between the planks to avoid all risk of catching a finger.

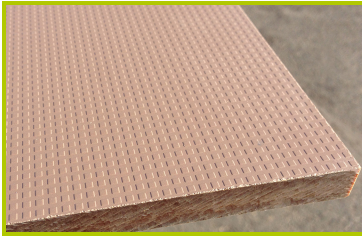

14-The platforms are made from a 12.5mm thick textured and non-slip compact material (HPL).




15-The junction pieces are made of painted galvanised steel.



16-The steps are made with a non-slip rubber overmould.



17-The caps are made of rotary moulded polyethylene.

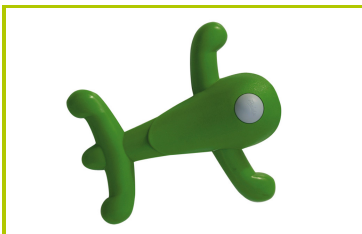

18-The climbing holds are made of polypropylene. They are non-toxic, inflammable and shock and UV resistant.



19-The fixings are made of stainless or plated steel and protected by anti-vandalism polyamide caps.