


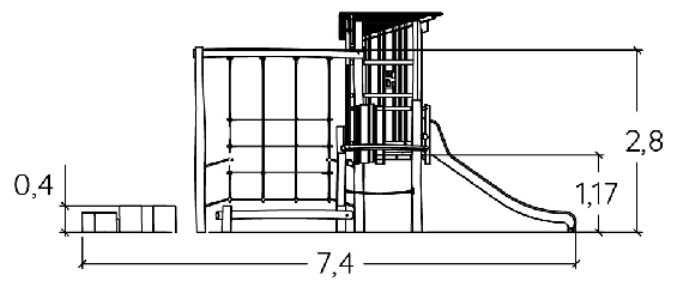
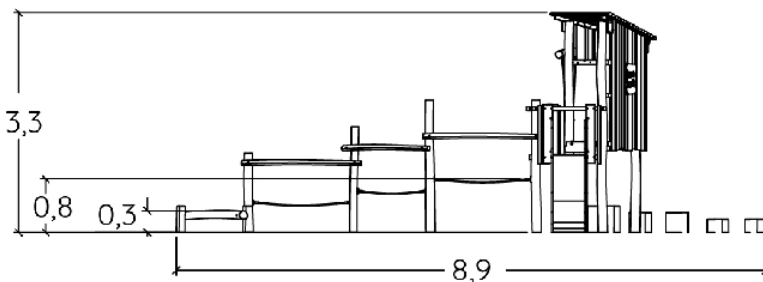
 **3+**  
 **17**  
 **1,7m**











  
1 = 7,75m  
2 = 8,88m  
3 = 3,32m




Physical inclusion  
 Sensory inclusion  
 Cognitive inclusion



**Play value : 15**

role play	sliding	meeting	jumping	balancing	taking shelter	visual stimulation	climbing
							
<b>x1</b>	<b>x1</b>	<b>x2</b>	<b>x1</b>	<b>x3</b>	<b>x1</b>	<b>x1</b>	<b>x1</b>
getting across							
							
<b>x4</b>							

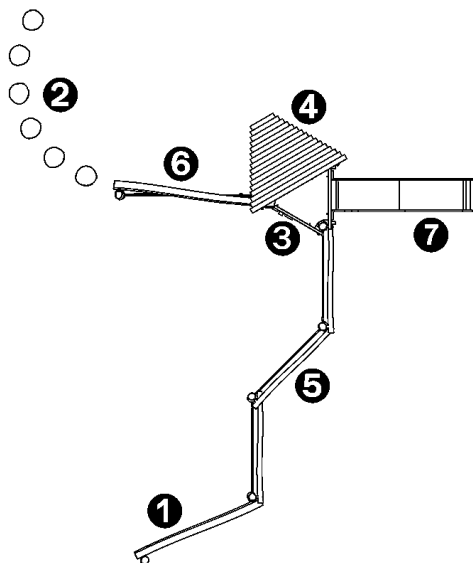

## Components





- ❶ Balance Beam
- ❷ Japanese steps
- ❸ Roof
- ❹ Platform Ht: 1.37m
- ❺ Rope walkway
- ❻ Vertical net
- ❼ Slide Ht: 1.17m

## Installation of equipment

**IMPORTANT:** It is essential to refer to the installation instructions for information on the size of the safety areas.

-  Impact area (minimum normative surface)
-  Free space

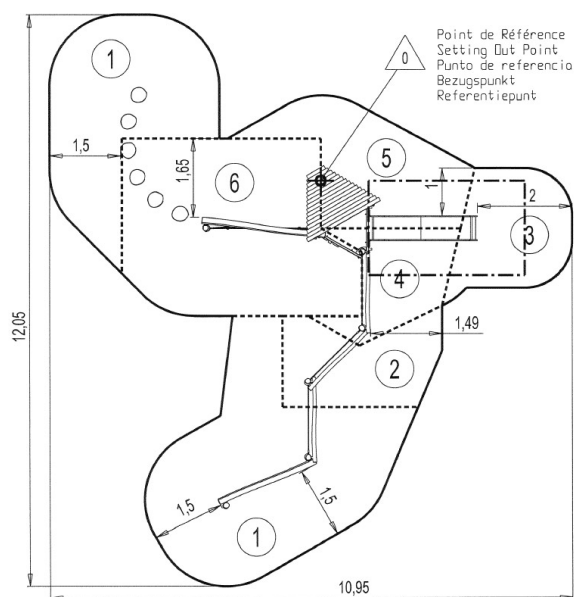

1	0,6m	29m <sup>2</sup>
2	0,86m	5,5m <sup>2</sup>
3	1m	5,6m <sup>2</sup>
4	1,17m	4,5m <sup>2</sup>
5	1,37m	8m <sup>2</sup>
6	1,7m	16,5m <sup>2</sup>



2

9h50

0.39m<sup>3</sup>

69.5m<sup>2</sup>

873kg

250kg

EN  
1176