


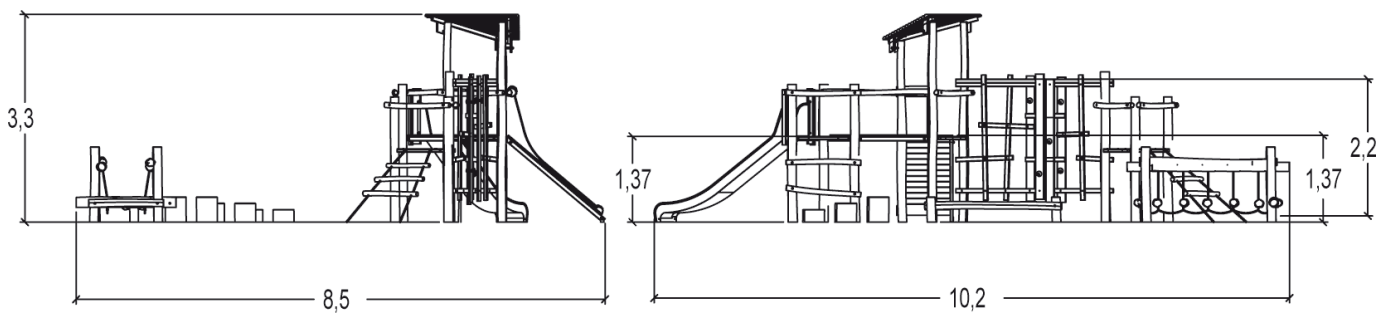
 **3+**  
 **32**  
 **2,3m**










  
 1 = 10,2m  
 2 = 8,5m  
 3 = 3,3m



Physical inclusion  
Sensory inclusion  
Cognitive inclusion



**Play value : 21**


climbing	role play	sliding	meeting	jumping	balancing	taking shelter	climbing
							
<b>x1</b>	<b>x2</b>	<b>x1</b>	<b>x3</b>	<b>x1</b>	<b>x4</b>	<b>x1</b>	<b>x3</b>

getting across



**x5**

## Components

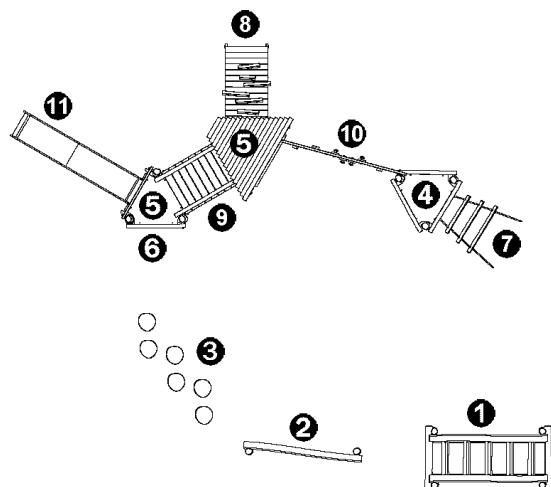


- ❶ Swinging log steps
- ❷ Balance Beam
- ❸ Japanese steps
- ❹ Roof
- ❺ Platform Ht: 1.37m
- ❻ Vertical ladder Ht: 1.17
- ❼ Flexible log ladder Ht: 1.17m
- ❽ Sloping ramp with logs Ht: 1.37m
- ❾ Crossover
- ❿ Climbing wall
- ⓫ Slide Ht: 1.37m

## Installation of equipment

**IMPORTANT:** It is essential to refer to the installation instructions for information on the size of the safety areas.

- Impact area (minimum normative surface)
- Free space

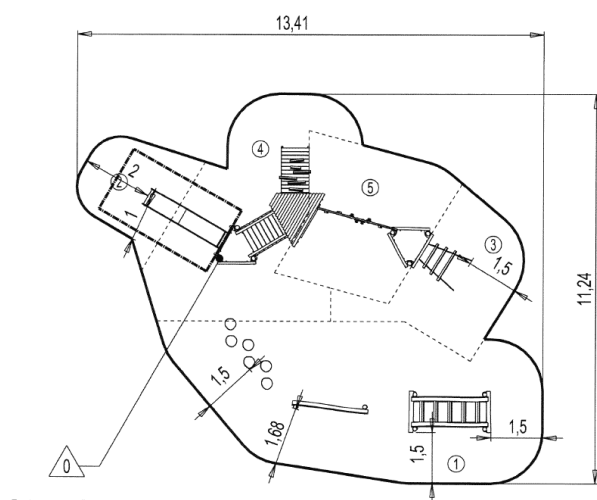

Point de Référence  
Setting Out Point  
Punto de referencia  
Bezugspunkt  
Referentiepunt



1	0,6m	41m <sup>2</sup>
2	1m	8m <sup>2</sup>
3	1,17m	13m <sup>2</sup>
4	1,37m	24,5m <sup>2</sup>
5	2,3m	16m <sup>2</sup>



2



08h00



0.24m<sup>3</sup>



102.5m<sup>2</sup>



1198kg



250kg

EN  
1176