

Permeable 'No Dig' Pathways (SuDS)

Typical base build up suitable for pedestrian use and occasional maintenance vehicles.

Recommended specification for Terrabase 'No Dig' Pathways:

0.5mm diameter glass grit lightly broadcasted onto uncured surface for antislip.

Surface Course

Hand applied and trowelled to a smooth/rustic finish by Addagrip approved installers. 30mm layer of 6-10mm aggregate (approx. 5mm is incorporated into the Addagrip).

Terrabase Addagrip


Laid by Addagrip approved installers. Depth of Terrabase Addagrip 7.1mm.

Terrabase Geofabric

Laid by Addagrip approved installers. Depth of Terrabase Geofabric 2.4mm.

Soil

CBR>5% required. If below, capping layers required to strengthen soil.

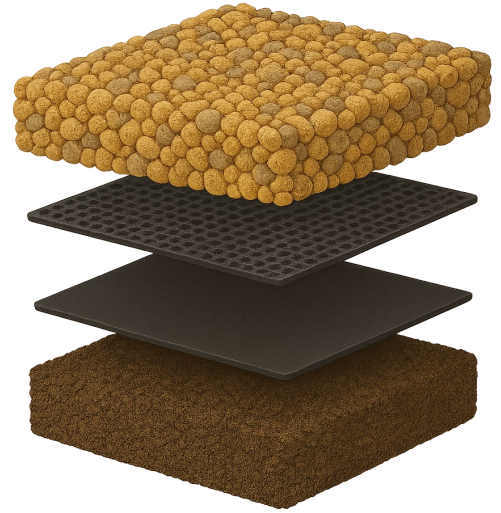

Note:

A suitable steel, wood, brick, stone or aluminum edging should be provided to ensure a neat edge detail. The maximum tolerance of the base should not exceed 3mm under a 1mm straight edge. If existing sub grade is silty, it may be necessary to stabilize it or partially replace it with sub base/granular capping layer. If there is danger of ponding, the sub base should be laid to falls. Total sub base depth will be dictated by loading and attenuation requirements.

Any advice, recommendation or information given by Addagrip Terraco Ltd is based on practical experience and is believed to be accurate at the time of publication. No liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its Servants or Agents.

The figures quoted do not constitute a specification, they represent typical values obtained for this product.