


TempGuard

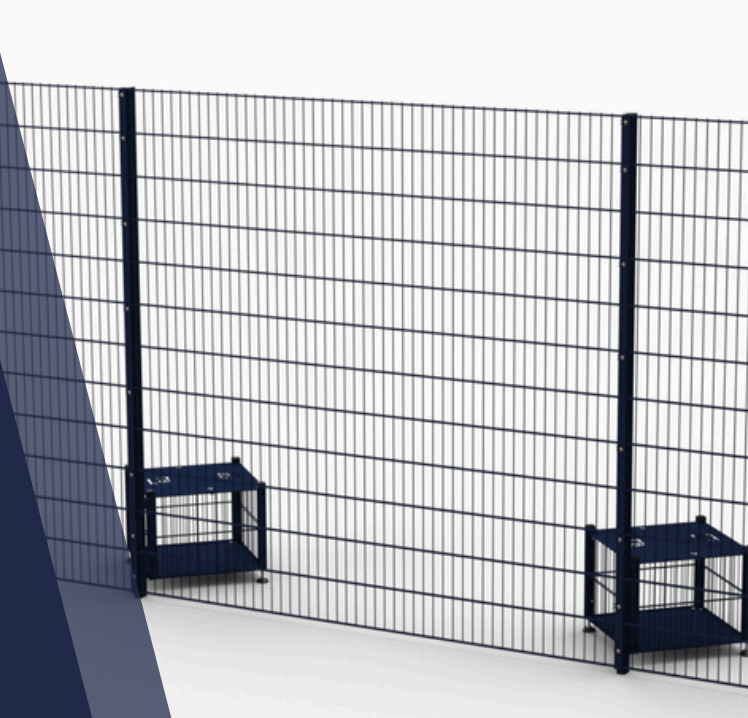

Description

TempGuard provides a robust, long lasting solution to temporary boundary demarcation.

This surface mounted system enables you to secure a boundary temporarily for events, construction, maintenance or protection of assets.

Our mesh fences stabilised by 590mm square baskets which can be filled with sand bags, water bags, blocks or other items to meet the weight required for wind loadings. To stabilise the system, the baskets have adjustable feet.

Choose from VGuard, TwinGuard and SecureGuard infills with standard posts as per our tried and tested permanent fences. The modular metal baskets are stackable for easy storage and manoeuvring. Baskets can be positioned square on, or diagonally for additional support. This system is galvanized and powder coated for longevity, making this perimeter reusable and sustainable.

Specific wind loading calculations can be provided on request.

Key Features

- Robust and long lasting temporary fence
- Neat and tidy appearance
- Modular design for easy stacking
- Wind loading calculations provided upon request
- Available up to 2.4m high
- Adjustable feet for uneven ground
- Weather resistant
- Won't be damaged by UV rays
- Not susceptible to fire damage
- Sturdy gates available



Specifications

Infill	Height	Post Centres	Post Section RHS	Max Wind Loadings
VGuard	2	1.51	60x40	141mph
VGuard	2	3.02	60x40	105mph
VGuard	2.4	1.51	60x40	112mph
VGuard	2.4	3.02	60x40	87mph
TwinGuard	2	1.26	60x40	130mph
TwinGuard	2	2.52	60x40	121mph
TwinGuard	2.4	1.26	60x40	112mph
TwinGuard	2.4	2.52	60x40	83mph
SecureGuard	2	1.22	80x40	103mph
SecureGuard	2	2.44	80x40	76mph
SecureGuard	2.4	1.22	80x40	87mph
SecureGuard	2.4	2.44	80x40	63mph

Gate Dimensions

	Max Width (m)	Opening Inward	Opening Outward
Single Leaf	3.5m	90°	90°
Double Leaf	7m	90°	90°

Includes lockable drop bolt and slide latch, and a Locinox U-Safe