

MacMat® the solution that allows you to quickly recover the natural environment

MacMat® Geomats are three-dimensional matrix geosynthetics; composed of polymeric fibres to protect surfaces susceptible to erosion. At the same time, they reinforce the already developed vegetation. For steep natural slopes the use of MacMat® Geomat, reinforced with either a double-twist hexagonal mesh or synthetic geogrid as indicated.

Main functions of MacMat®:


- M** Protect the surface against erosion caused by rain and wind, as well as damage caused by the "splash" effect (mechanical action of the impact of raindrops on the ground);
- M** Reduce the speed of over the surface of the terrain, increasing its roughness;
- M** Avoid the carriage of soil particles from the protected surface
- M** Prevent the formation of ravines on the slopes;
- M** Allow vegetation to pass between your filaments;
- M** "Acting" as reinforcement for the roots of vegetation;
- M** Creating an environment conducive to growth of vegetation, decreasing solar radiation .



MacMat® R3



Slope coating with MacMat® R3

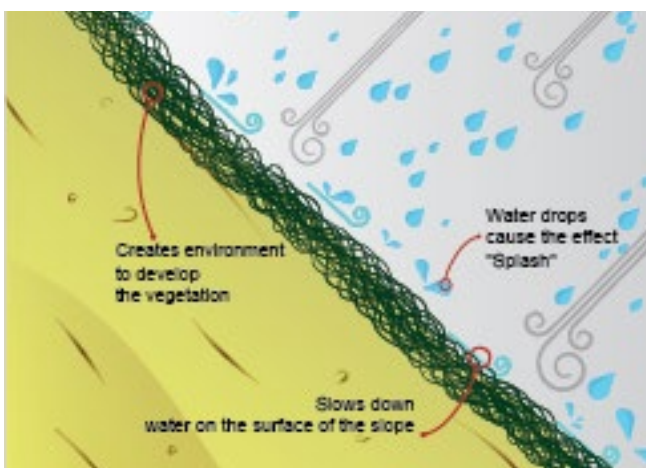

MacMat® protects the soil from erosive processes arising from the action of wind and rain.



After the development of vegetation, MacMat® strengthens the roots and ensures the longevity of protection created.

PRODUCT FAMILY MACMAT®

Specially developed for erosion control on slopes and waterways. The MacMat® family has different geoblankets for each type of application, see:

M MacMat® R1 - Face coating for stapled soil;

M MacMat® HS - Coating of slopes with variable slopes in soil or rock, which require high tensile strength of the reinforced geoblanket.



MacMat® HS



MacMat® R1

MACMAT® APPLICATIONS:



Slope cladding above a retaining wall in gabions with MacMat® R3



Stormwater drainage channel coating with MacMat® 10.1



Coating the face of a stapled soil with MacMat® HS



Coating of the face of a soil stapled with MacMat® HS or MacMat® R1



Coating of the face of containments in soil reinforced with MacMat® 10.1



Coating of the face of an erosion recovery with MacMat® 10.1

MacMat® geomats can be produced in green, brown* and black*. Consult our engineers to help define the best MacMat® geomat for each type of application.

* Colours on request

Maccaferri Ltd
T: +(44) 01865 770 555
E: info.uk@maccaferri.com

www.maccaferri.com/uk

Republic of Ireland Maccaferri Partner - Geostrong
T: +(353) 01885 1662
E: Sales@geostrong.net

www.geostrong.net