



Cableways

(technical specification)

J522




1- **The different posts** (average diameter: 60 to 80mm / 120 to 140mm) are made from sap free robinia. The robinia is sanded and has had its bark removed. Robinia is naturally rot proof and does not require any additional chemical protection; it is equally extremely resistant to attacks from external sources (insects, fungi, climatic variations), guaranteeing the long term durability of the playground equipment.



2- **The platforms** are made from a 27mm and 40mm thick sap free robinia. The robinia is sanded and has had its bark removed. Robinia is naturally rot proof and does not require any additional chemical protection; it is equally extremely resistant to attacks from external sources (insects, fungi, climatic variations), guaranteeing the long term durability of the playground equipment.



3- **The trolley** is made of stainless steel ensuring its durability. The trolley wheels are made of polyamide, reducing noise levels during usage. The braking mechanism of the pulley ensures that it rests in a stationary position when no force is applied.

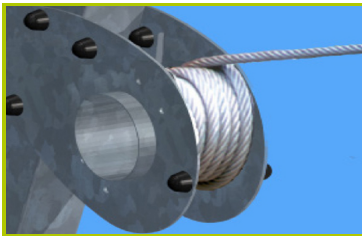

4- **The correct tension of the 10mm diameter galvanized steel cable** is easily maintained via a ratchet system.



5- **The cableway seat** is made of shock absorbing honeycomb rubber. The supporting chain is made from galvanised steel and covered with a protective plastic coating.



6- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.