



# ACTI'Fit

(technical specification)

J37229



1- **The 70 x 70mm post** is made of painted galvanised steel, ensuring robustness and durability.




2- **The cap** is made of painted stainless steel.




3- **The structure of the equipment** is made of painted galvanised steel. The coloured panels are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



4- **The polyurethane foam seats and backrests** ensure lasting comfort. Polyurethane foam is a resistant, anti-perspiration shape memory material that helps to prevent overheating. The seat is supported by a painted galvanized steel frame structure.

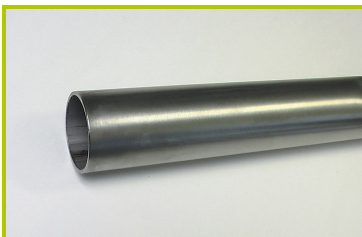

5- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.

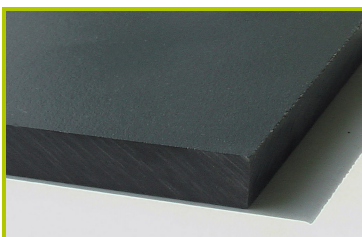

6- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



7- **The hydraulic** oil piston is made up of elements manufactured from chrome, aluminium and stainless steel. Users can adjust the resistance from just a few kilogrammes up to as much as 60kg on certain machines.



8- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.