

BOOM TYPE GATE

PRODUCT SPECIFICATION



- The Boom Type Gate blocks vehicular access through a controlled point. Typically, the tip of a boom gate rises in a vertical arc to a near vertical position. Boom gates are often counterweighted, so the pole is easily tipped.
- A typical Boom Gate has a 65mm thick boom, three SSP200 posts, two Stainless Steel gudgeons and two Stainless Steel keeps.
- Available in nine standard size options, however custom sizes are available upon request.
- The boom type gate is manufactured in-house, so can be customised to meet your requirements.
- No routine treatment and maintenance required.
- Available in FSC Certified Hardwood.



scan for the
woodscape
website



The mark of
responsible forestry


Woodscape products are manufactured from Naturally Very Durable Hardwoods, sourced from sustainable forests, as standard. As an FSC® certified supplier we can manufacture our products using FSC certified timber as required.

BOOM TYPE GATE

PRODUCT SPECIFICATION

Technical Data: Typical Boom Type Gate

Please contact Woodscape for standard or bespoke detailed customer drawings.

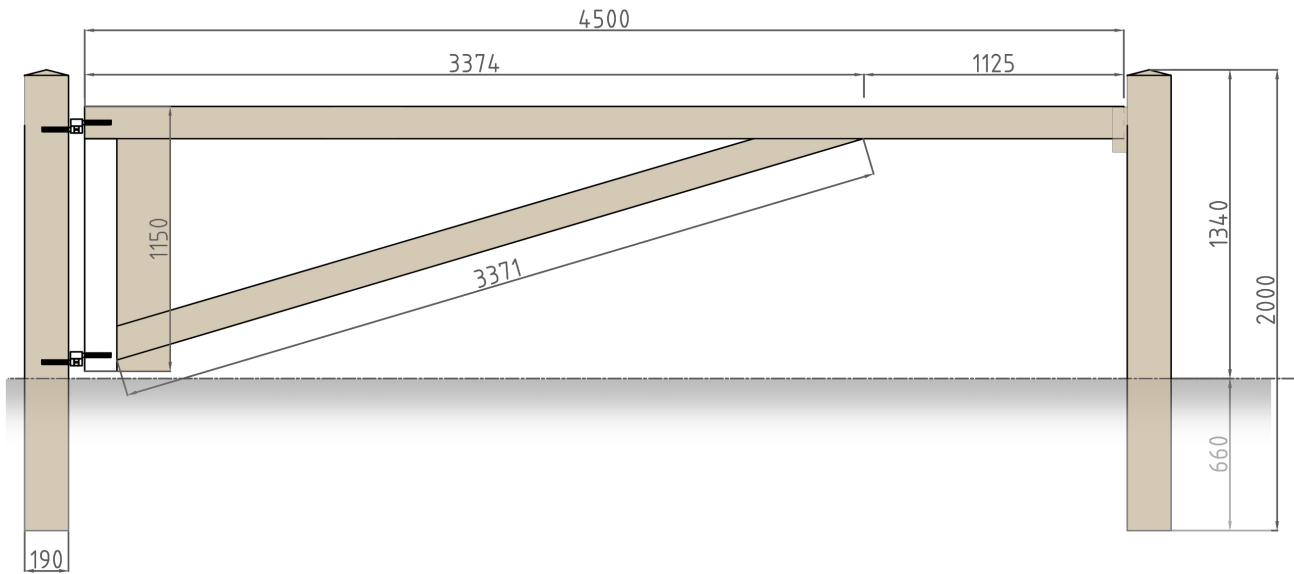

Standard Sizes	Height	Post
2000mm Long Boom	850mm	1650mm
2500mm Long Boom	850mm	1650mm
3000mm Long Boom	850mm	1650mm
3500mm Long Boom	850mm	1650mm
4000mm Long Boom	850mm	1650mm
4500mm Long Boom	850mm	1650mm
5000mm Long Boom	850mm	2000mm
5500mm Long Boom	850mm	2000mm
6000mm Long Boom	850mm	2000mm