


Joist Noggin

Technical Datasheet

Steel bracing strut for aluminium joists.

The benefits to using the Joist Noggin spacers are:

- To evenly space the joists to the exact centres of the surface being used,
- Increase the rigidity of the substructure
- Available for both **30mm & 50mm joists**,
- Does not require any fixings.

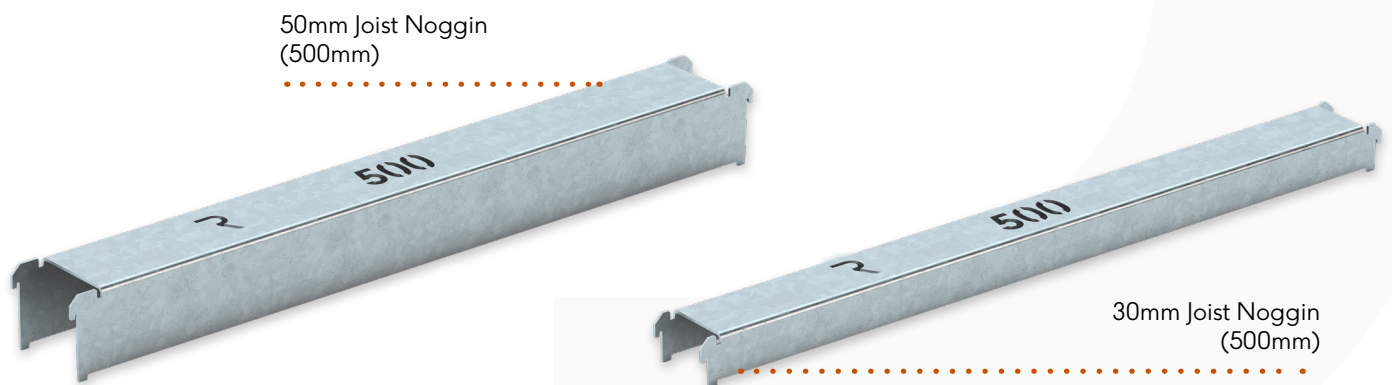

PRODUCT INFORMATION

NOGGIN TYPE	SIZE (MM)	WEIGHT (KG)	SKU CODE	DIMENSION (L x W x H)	CARBON* (KG / CO2)	MATERIAL SPEC (PRE-GALVANISED STEEL)
30 mm	400	0.32	304018	350 x 40 x 27	0.97	✓
	500	0.42	304016	450 x 40 x 27	1.27	✓
	600	0.52	304015	550 x 40 x 27	1.52	✓
50 mm	400	0.51	304013	350 x 40 x 47	1.55	✓
	500	0.66	304011	450 x 40 x 47	2	✓
	600	0.82	304010	550 x 40 x 47	2.48	✓

* Carbon - Basing the carbon embodiment (global warming potential) of 0.1-0.33KG equivalent per kilogram of steel, the results are as follows, using the calculation of (kg of steel/0.33).



FIND OUT MORE OR REQUEST A SAMPLE

e: technical@raaft.co

w: raaft.co

© 2021 Raft Ltd.

At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. Any images and diagrams used in this sheet are intended only as illustrations. No rights can be derived from them.