

# play unit Titanos



Age indication



Fitness



Senses



Speed



Imagination



Social skills



Something new to




Balance




Creativity

## Scope of delivery



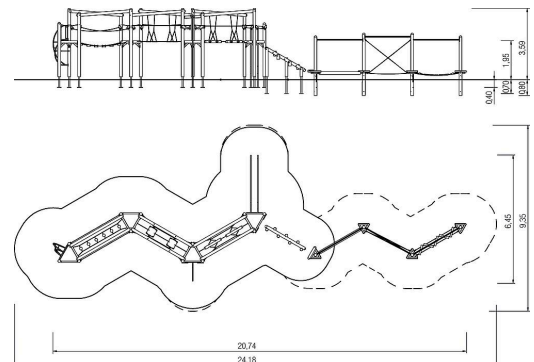



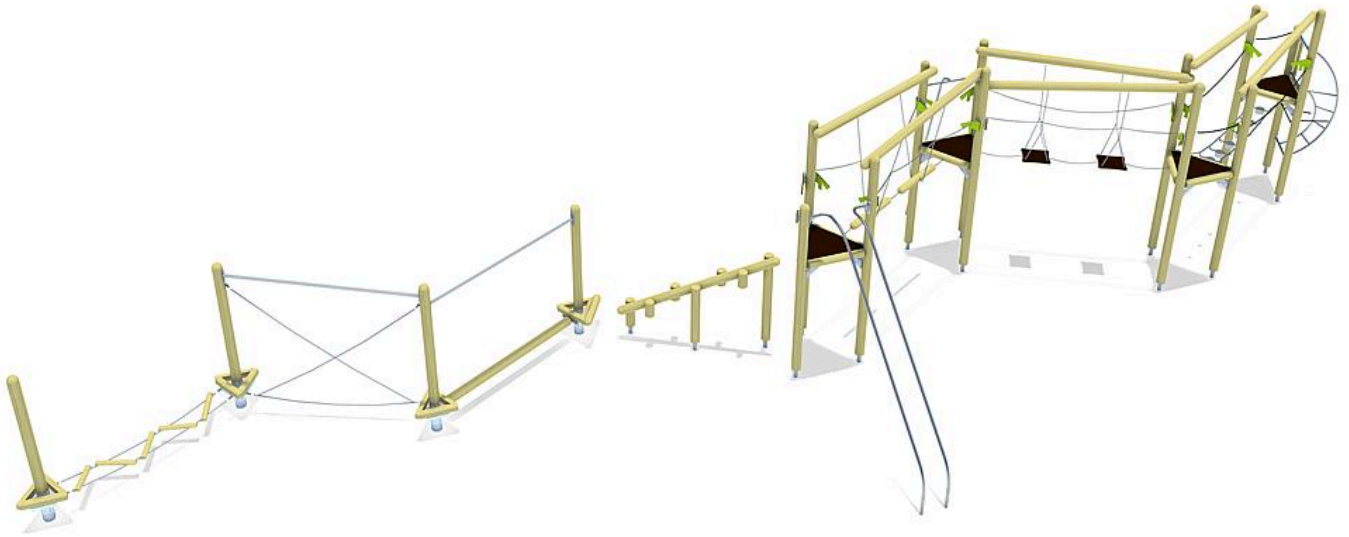




- 12x post construction: softwood or steel
- 4x platform construction: galvanised steel
- 4x platform: high-pressure laminate (HPL)
- 1x beam post ascent: softwood
- 1x banister slide: stainless steel
- 1x fireman's pole: stainless steel
- 1x lavender ascent: stainless steel, plastic-coated steel cable, softwood
- 1x island crossover: high-pressure laminate (HPL), stainless steel, softwood
- 1x seesaw beam crossover: softwood, stainless steel
- 1x post chain crossover: softwood, stainless steel
- 2x walk-through protection: plastic-coated steel cable, stainless steel
- 1x frame trim: softwood
- 4x island post: hardwood oiled or steel
- 4x platform: oiled hardwood
- 1x cable crossing: plastic-coated steel cable
- 1x pre-assembled zigzag bridge: hardwood oiled, plastic-coated steel cable
- 1x rotating beam with maintenance-free bearing: hardwood oiled, stainless steel














# play unit Titanos



## Technical data

	Material	SW pi
	Minimum space	24,18x9,35x4,46 m
	Impact protection net	82,5 m <sup>2</sup>
	Free falling height	266 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	Largest section	Ø 14x344 cm
	mx. number of users	70
	Certificate	-
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

## Installation information

	Foundations	21x CF or 14x PFs + 7x CF
	Fundamentlevel	ET 400/800
	Assembly	2 persons/14 h
	PF Accessories	14x 5632540
	PF drainage	0,15 m <sup>3</sup>
	PF concrete	0,54 m <sup>3</sup>
	PF excavation	4,49 m <sup>3</sup>
	CF Accessories	15x 5631120
	CF drainage	0,15 m <sup>3</sup>
	CF concrete	1,24 m <sup>3</sup>
	CF excavation	2,91 m <sup>3</sup>



5 25 060 011 00

# play unit Titanos



**CO<sub>2</sub> emissions of the product**

**3117,8 kg**

**Material share of renewable raw materials**

**60%**

**Recyclate content**

**31%**

Circularity score



Weighted emission factor of the product\*



**Disclaimer:**

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at [gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/](https://gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/).

\* The CO<sub>2</sub>e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024