



PERIMETER
SECURITY
MANUFACTURER

PRODUCT TITLE:

Lochrin Defender™ SL3 Palisade

PRODUCT DATA SHEET



WHY CHOOSE DEFENDER™ SL3 PALISADE MANUFACTURED BY LOCHRIN BAIN

- Certified to LPS1175 Issue 8: C5 (SR3).
- Unique patented design.
- Independently attack tested for a maximum security perimeter solution.
- Minimum guaranteed delay time of 5 minutes against attacks using tools such as scissor jacks and power tools.
- Additional vertical pales and anti-cut steel added to improve delay times.
- Full system uses only 10 fixings per panel for excellent installation times and superior aesthetics.
- Manufactured in the UK using British Steel.
- Secured By Design product which is a Police preferred specification.
- Vee slot design for added security.
- Manufactured to exceed BS1722-12:2016.
- Drawings can be supplied in both CAD and BIM format.
- 40 year design life guarantee.
- Defender™ is supplied in kit-form for ease of transportation, handling and installation.
- Designed to rake to suit uneven or sloping ground conditions.
- Full range of Pedestrian and Vehicle gates available.
- Cantilever, Tracked and Bi-folding gates available.
- Available in a choice of RAL colours.



RAIL



INDUSTRIAL



COMMERCIAL



UTILITY



#WESECUREWHATYOUNEEDTOPROTECT

WWW.LOCHRIN-BAIN.CO.UK SALES@LOCHRIN-BAIN.CO.UK +44 (0)1236 457333





PERIMETER
SECURITY
MANUFACTURER

PRODUCT TITLE:

Lochrin Defender™ SL3 Palisade


PRODUCT DATA SHEET

Product Technical Information

| | |
|-----------------------|--|
| Standards: | Manufacturing: BS1722-12:2016. Galvanizing: BS EN ISO 1461:2009. Powder Coating: BS EN 13438:2013. Certified to LPS1175 Issue 8: C5 (SR3). |
| Panel Height: | 2.4m / 3.0m high – bespoke heights available from 2.4m up to 4.5m. |
| Post Centres: | 2.75m (+/-10mm) Bespoke widths available upon request. |
| Post: | 1 No. 127x76x3125mm UB (2.4m) / 1 No. 127x76x3925mm UB (3.0m). |
| Post to Rail Fixings: | 40x10mm x 160mm Fishplate for connecting to rails using M12x30 Cup Square Bolts c/w M12 Shear Nuts. |
| Rails: | 3 No. 50x50x6mm Vee slot RSA (2.4m) / 3 No. 50x50x6mm Vee slot RSA (3.0m). |
| Pales: | 26 No. 'D' 4mm x 2350mm with anti-cut plates (2.4m) / 26 No. 'D' 4mm x 2950mm with anti-cut plates (3.0m). |
| Pale Heads: | Single Point. |
| Pale Fixings: | Not required on the Defender™ system due to its unique and patented design. |
| Finish: | Hot Dipped Galvanized as standard with an option to powder coat to various RAL colours including marine grade if required. |
| Anti-Climb Toppings: | Various options available on request including extensions for Barb, Barbed Tape, Razor Coil & Rotating Spikes. |
| Gates: | Pedestrian and Vehicle gates are manufactured in various widths to suit LPS1175 Issue 8: B3 Combi™ specification. |
| Enhancements: | Compatible with all EPID & MPID systems. |
| Foundations: | Foundation details vary depending on site location and ground conditions, refer to BS1722-12:2016 for guidance. |
| Warranty: | 40 Year design life guarantee provided upon request. |



LPS 1175: Issue 8
Cert/LPCB ref.1337/01

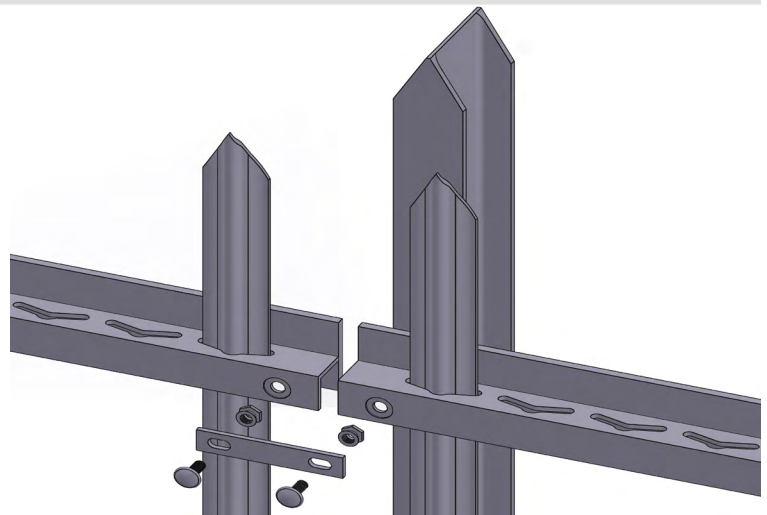

CLICK NOW

SCAN
QR CODE
TO FIND
OUT MORE

DISCLAIMER

Contractors shall employ experienced installers, providing qualified supervision to complete works as specified by the manufacturer and in accordance with BS1722-12:2016. Every care has been taken to ensure that the information provided in this document is accurate at date of print. Lochrin Bain Ltd reserve the right to change product specification at any time. Contractors must ensure exact dimensions and specification is confirmed prior to ordering of material and installation.

Document Ref: DS/DEFSL3PAL



#WESECUREWHATYOUNEEDTOPROTECT
WWW.LOCHRIN-BAIN.CO.UK SALES@LOCHRIN-BAIN.CO.UK +44 (0)1236 457333

