

















Standard Unit Dimensions:

Width: 2140mm
Height: 2150mm

Length with Capacities:

2000mm (4 Cycles)
3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)
6000mm (14 Cycles)

Colours/Finishes:

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Wardale® cycle shelter is our best selling and most versatile shelter. With its modular design the Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Wardale can also be fitted with Swinging or Sliding gates with a range of locking mechanisms available to create a fully lockable and secure shelter.

Features

- Polycarbonate End Panels Included
- Robust modular construction featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Bottom purlin provides anti-crawl bar on level surface
- Hot dipped galvanized to BS EN ISO 1461:2022
- 4mm Clear View PETg UV Roof and Side Cladding (5mm also available)
- Bream Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
System
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

EMS 20278

EMS 45526

ONS 547079



Wardale® Cycle Shelter BXMW/WAR

Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Standard Unit Dimensions:

Width: 2140mm
Height: 2150mm

Length with Capacities:

2000mm (4 Cycles)
3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)
6000mm (14 Cycles)

Colours/Finishes:

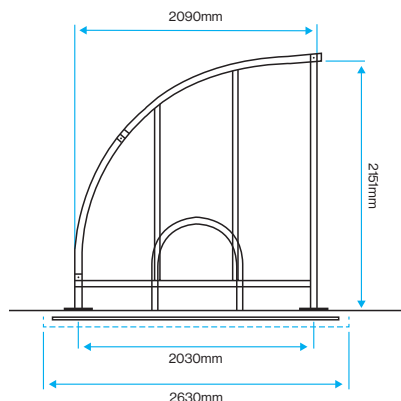
Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White
BS 4800 20 C 40 Midnight Blue	BS 4800 18 B 25 Dark Admiralty Grey	RAL 6005 Moss Green

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

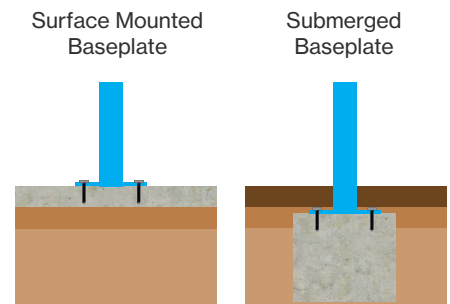
Options

- Steel profile, trapezoidal roof cladding
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Sliding Security Gates
- Mechanical or Keyed Locks
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Diagram



Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

EMS 20278

EMS 45526

OH&S 547079

