

double swing Lily of the Valley



Age indication



Speed





Senses



Social skills

Scope of delivery

1x swing frame: softwood
2x swing beam with cover: galvanised steel, high-pressure laminate (HPL)
2x swing seat for toddler: rubber
post shoes: galvanised steel














double swing Lily of the Valley



Technical data

	Material	Larch GL green, larch
	Minimum space	6,75x6,00x2,00 m
	Impact protection net	24,0 m ²
	Free falling height	93 cm
	Ground constitution GE/NL/B	at least lawn
	Ground constitution all except GE/NL/B	minimum grass
	Largest section	Ø 14x170 cm
	Heaviest section	17 kg
	mx. number of users	2
	Tested according to standard	EN 1176 - 1/2/7
	Service interval (in months)	3

Installation information

	Foundations	6x CF or 6x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/1.5 h
	PF Accessories	6x 5632540
	PF drainage	-
	PF concrete	-
	PF excavation	0,56 m ³
	CF Accessories	6x 5631120
	CF drainage	-
	CF concrete	0,29 m ³
	CF excavation	0,67 m ³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height



5 59 834 041 21

double swing Lily of the Valley



CO₂ emissions of the product

406,3 kg

Material share of renewable raw materials

43%


Recyclate content

26%

Circularity score



Weighted emission factor of the product*

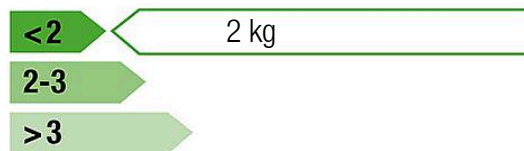

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024