

play unit Robin, solo



Age indication



Speed



Fitness



Balance



Social skills



Imagination




Balance




Fitness

Scope of delivery

18x post construction: SW
 18x post shoe: steel galvanised
 4x platform construction: SW
 8x wall panel: HPL
 1x balance beam straight: SW
 4x walk-through protection leaf: stainless steel
 1x gecko crossing oblique: stainless steel, HPL, SW
 4x set of grips: aluminium, plastic coated
 1x monkey bars: SW, rungs stainless steel, HPL
 1x suspension bridge oblique: SW, chain steel galvanised
 4x cord protection: HPL
 1x ladder vertical: SW, rungs stainless steel
 2x ladder: SW, rungs stainless steel
 1x net ascent vertical: polyester-coated steel cable
 1x net bridge straight: SW, polyester-coated steel cable
 1x slide entry plate: HPL
 1x fireman's pole: stainless steel
 1x play panel click wheel: HPL, stainless steel, plastic
 1x play panel gear wheel: HPL
 2x pitched roof: SW, HPL
 1x counter: SW, HPL
 6x access restriction: HPL

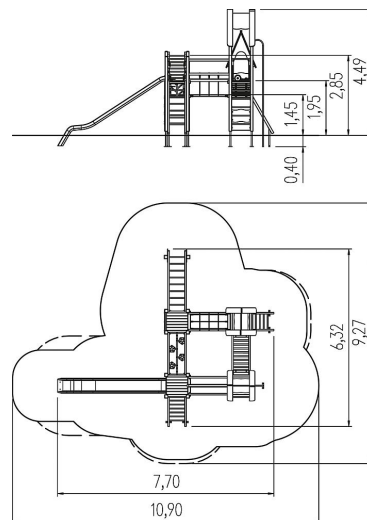

play unit Robin, solo

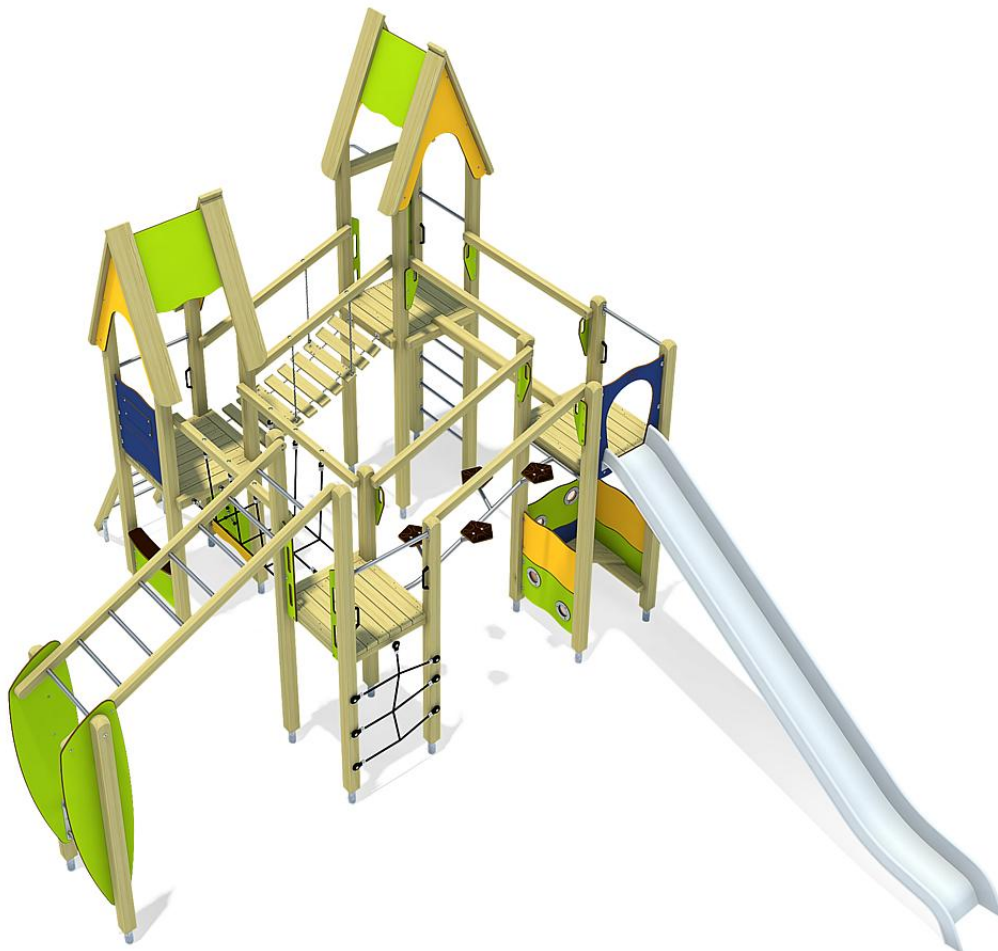

Technical data

	Material	SW pi
	Minimum space	9,27x10,70x4,52 m
	Impact protection net	64,5 m²
	Free falling height	285 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	86
	Certificate	Z2_010651_0526_Rev00
	Tested according to standard	EN 1176 - 1/3/7

Installation information

	Foundations	20x CF or 21x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/15 h
	PF Accessories	21x 5632540
	PF drainage	-
	PF concrete	-
	PF excavation	1,97 m³
	CF Accessories	-
	CF drainage	-
	CF concrete	1,03 m³
	CF excavation	2,41 m³

Accessories

-  Slides for platform heights: 1x 195 cm
- Installation accessories e.g. PF
Please order accessories separately to complete the
appliance.



Gesellschaft
für Klimaschutz
München



5 11 024 011 10

play unit Robin, solo



CO₂ emissions of the product

1742,1 kg

Material share of renewable raw materials

63%


Recyclate content

13%

Circularity score



Weighted emission factor of the product*

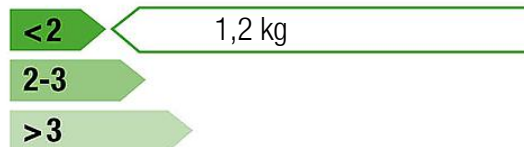

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024