




Pedestrian Guardrail Galvanised and Galvanised & Colour

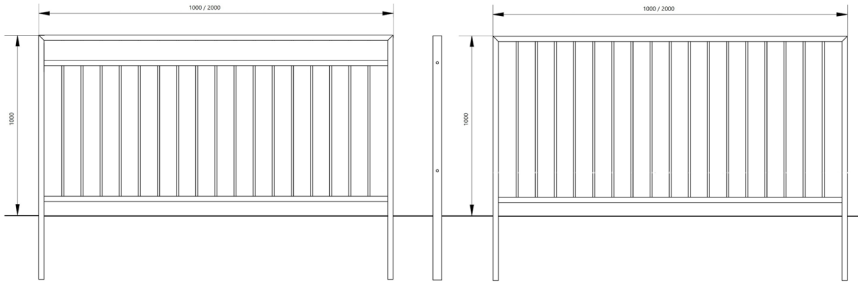

Designed to protect and guide pedestrians, the Pedestrian Guardrail from AUTOPA is ideal for busy junctions and thoroughfares. Designed in accordance with BS EN 7818 for class 1 and 2 loading, it is manufactured from highly durable mild steel and galvanised as standard to ensure its longevity.

The infill bars are made from 12mm solid mild steel bar, and the panels are available full height, or with an additional “visibility gap” for areas where extra visibility is required. The panels are supplied galvanised as standard, but can be colour coated as required (RAL codes must be supplied at time of order).

Available ragged only.



Part Number	Description	Weight (kg)
138 174 501	1 Metre Panel - Galvanised	18kg
138 174 500	2 Metre Panel - Galvanised	34kg
138 174 505	2 Metre Panel - Galvanised & Coated	34kg
138 174 551	1 Metre Panel with Visibility Gap - Galvanised	15kg
138 174 550	2 Metre Panel with Visibility Gap - Galvanised	31kg
138 174 552	2 Metre Panel with Visibility Gap - Galvanised & Coated	31kg

Product details

- 12mm diameter bar
- 50mm x 30mm rectangular hollow frame
- 1000mm height (above ground)
- Concrete in 400mm (below ground)

Installation & use

Each leg will require setting with concrete into a hole of at least 300mm x 300mm x 400mm (length x width x depth).
This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

