


Tools:



x1  
TX30 Driver Bit

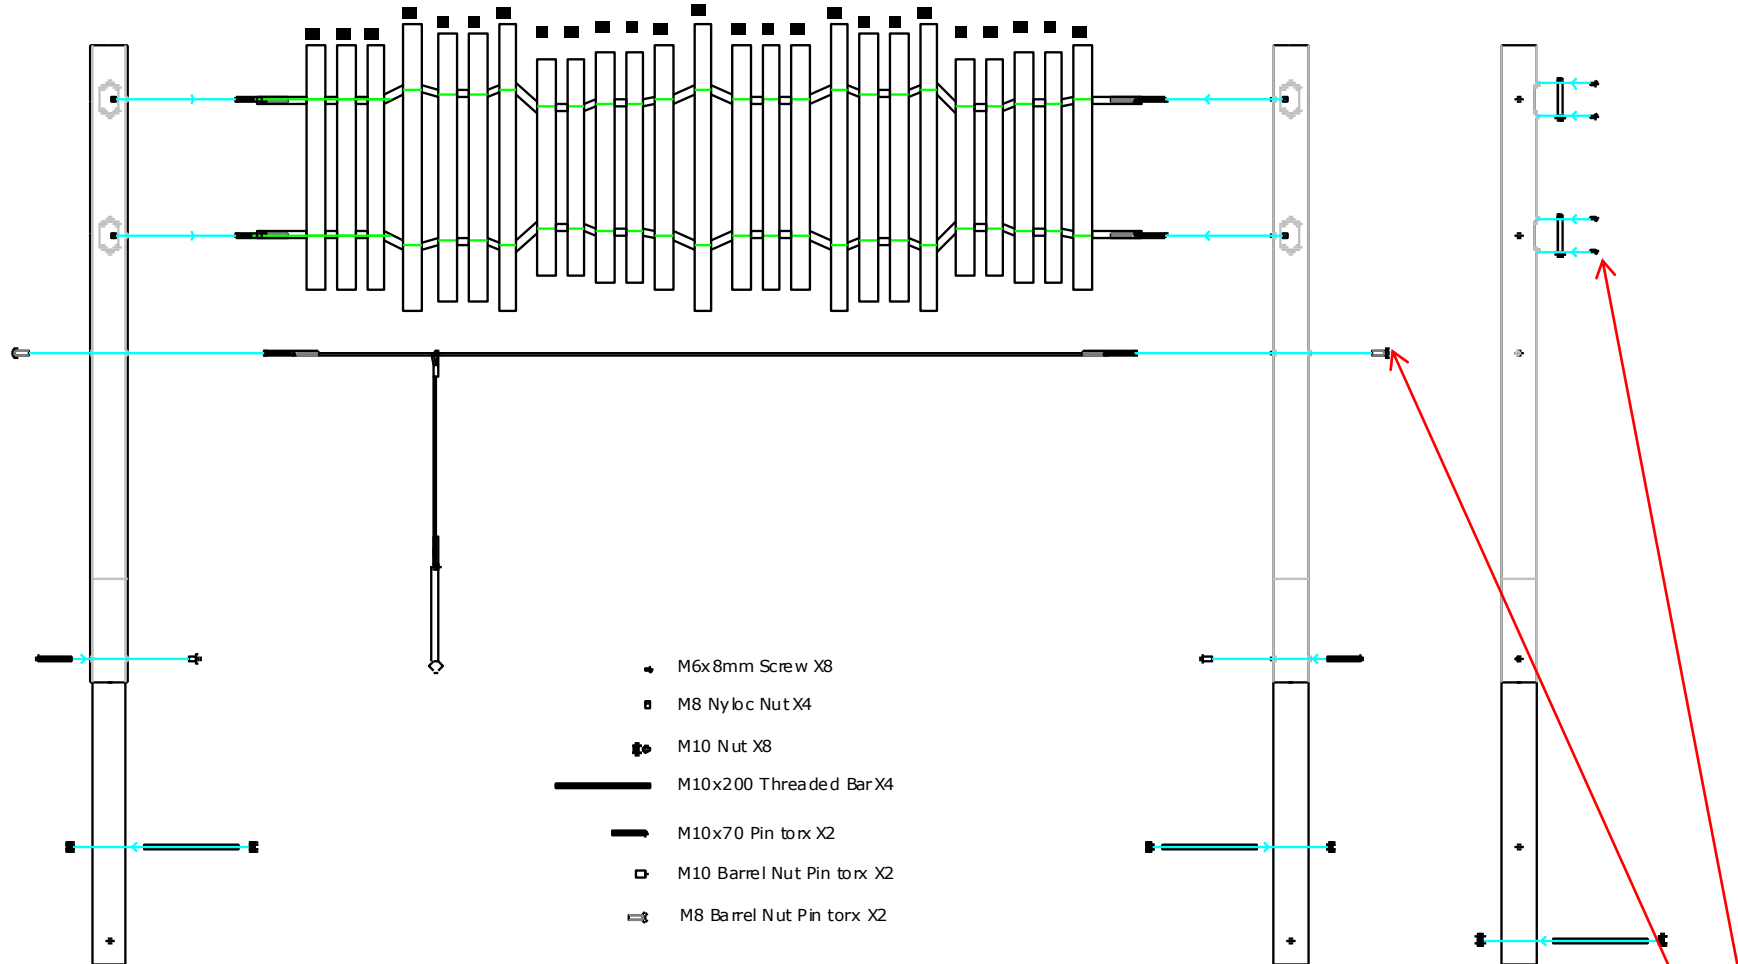


## MY TUNES "Old Mac Donald"










Ground Fixed  
My Tunes  
Page 1 of 3




Components:

-  x2
- M8 Barrel Nut
-  x4
- M8 Nyloc Nut
-  x8
- M6x8mm Pin Torx

-  x8
- M6x8mm Screw X8
-  x4
- M8 Nyloc Nut X4
-  x8
- M10 Nut X8
-  X4
- M10x200 Threaded Bar X4
-  X2
- M10x70 Pin torx X2
-  X2
- M10 Barrel Nut Pin torx X2
-  X2
- M8 Barrel Nut Pin torx X2





Thread Lock Solution  
Required (Not Supplied)

Thread Lock Solution  
Required (Not Supplied)

Small Beaters X1

Ground Fix Components:

-  x4
- M10x200 Threaded Bar
-  x8
- M10 Nut
-  x2
- M10 Barrel Nut
-  x2
- M10x70 Security Screw

Spares available from  
[percussionplay.com](http://percussionplay.com) or from your  
local distributor


Kg

# Ground Fix Installation

Foundations should not present a hazard. These foundations are recommended as a guide, for more information on foundation details for various surface see Part 7 of BS EN 1176.

## Ground Fixed

My Tunes  
Page 2 of 3

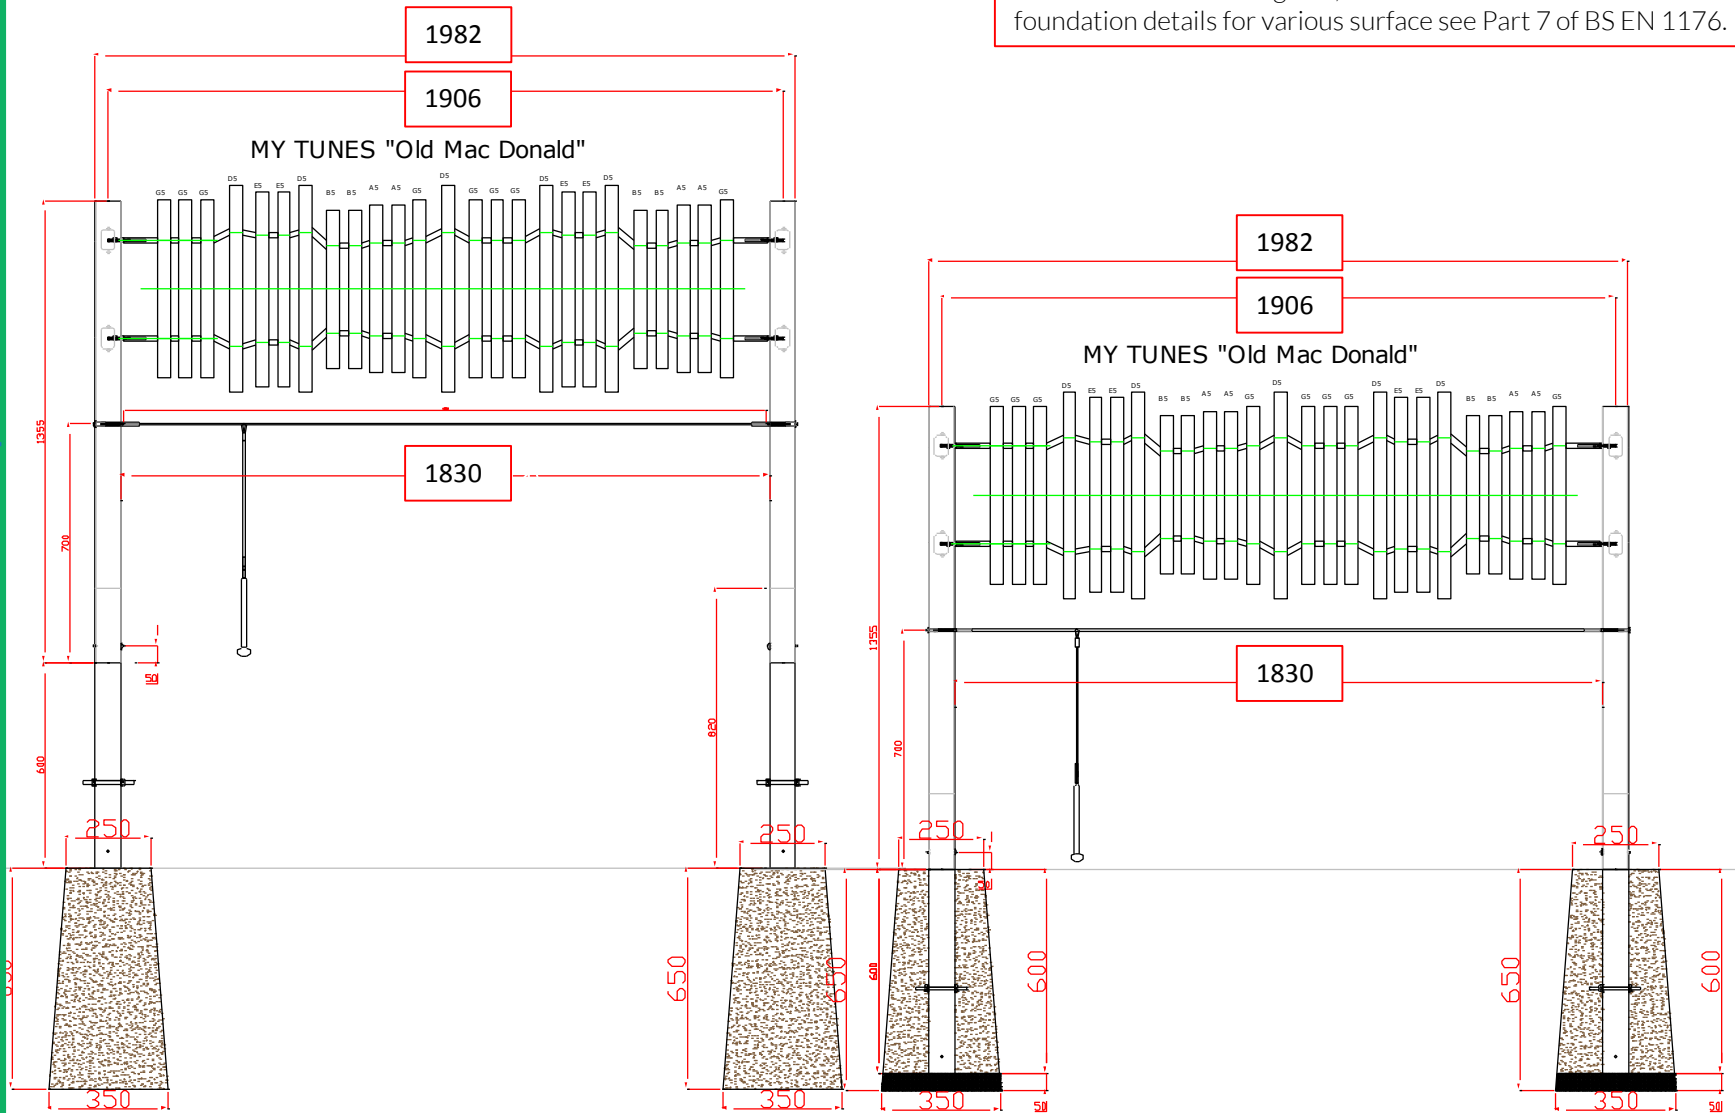

### Components:

-  x4
- M10x200mm BZP Bar
-  x8
- M10 BZP Nut
-  x2
- M10x70 Security Screw
-  x2
- M10 Barrel Nut



1 Excavate 2 holes with a 250mm diameter tapering down to 350mm diameter and 650mm depth

2 Compact base of hole with 50mm of aggregate. Lower ground Fix posts attached to instrument into hole (check instrument straight and level, and at correct height before filling with concrete)

Foundations should not present a hazard. These foundations are recommended as a guide, for more information on foundation details for various surface see Part 7 of BS EN 1176.

## Ground Fixed

My Tunes  
Page 3 of 3

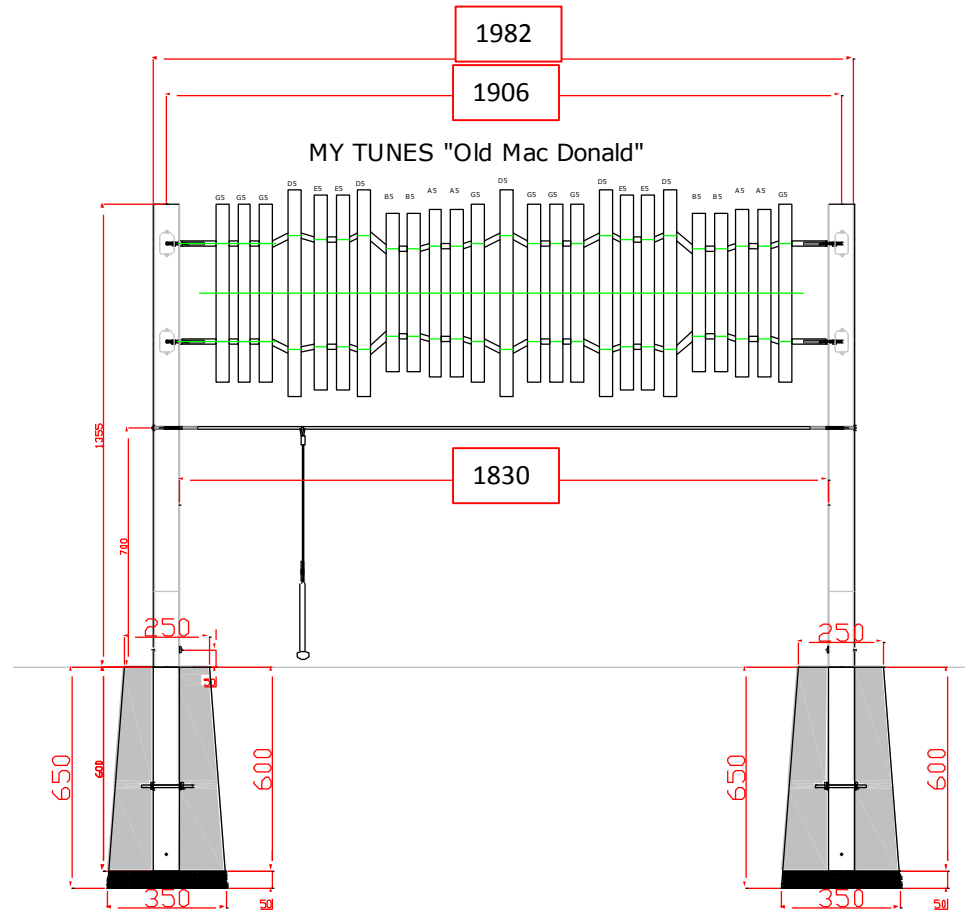

- 3 Fill holes with fast drying concrete to manufacturers specifications.

### Components:



M10x200mm  
BZP Bar  
X4



M10 BZP Nut  
X8

### Metric Conversion:

50mm/ 2"  
250mm/ 10"  
350mm/ 14"  
650mm/ 2 ft 1 19/32"  
1830mm/ 72 3/64"  
1906mm/ 75 3/64"  
1982mm/ 78 1/32"



**MADE IN  
BRITAIN**

BS EN 1176